
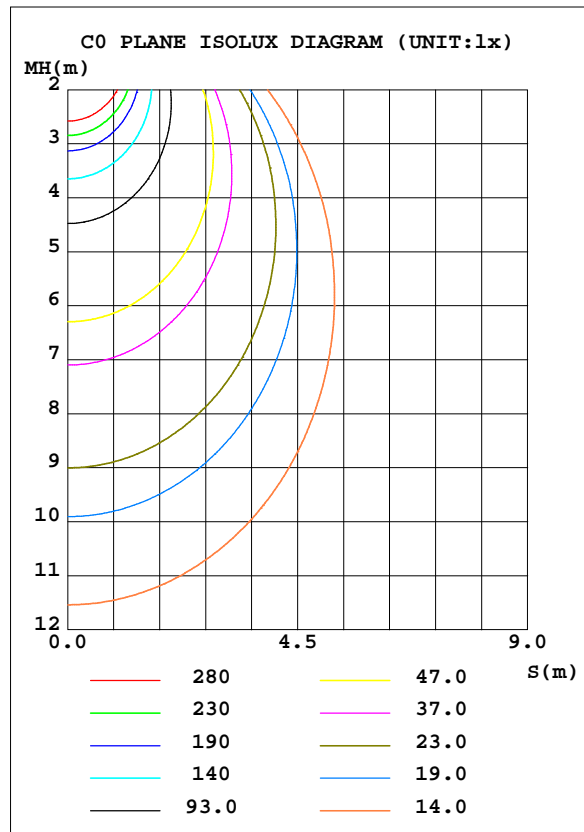


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.70V I:0.1720A P:39.100W PF:0.9760 Freq:50.00Hz		
Lamp Flux:4969.37x1 lm		
Name: NS50-1500MM-40W	Type: LED	
MFR.:	DIM.: 1500*50*75mm	
	SUR.: 1495*45mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 127.09 lm/W			
MODEL		I _{max} (cd)	1864	S/MH(C0/180)	1.17
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.22
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	4969.4	η UP, DN(C0-180)	1.3,48.7
NOMINAL FLUX(lm)	4969.37	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.3,48.7
LAMPS INSIDE	1	η up(%)	2.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.4	CIBSE SHR MAX	1.35

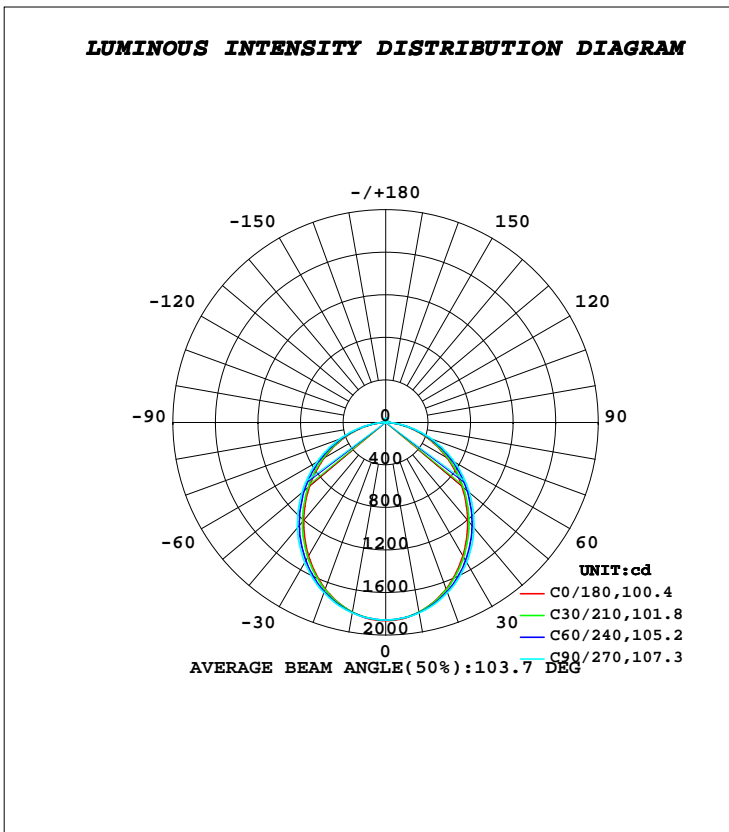

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1812	1812	1817	1812	1812	1812	1817	1812	0- 10	175.3	175.3	3.53,3.53
20	1665	1682	1703	1682	1665	1682	1703	1682	10- 20	495.3	670.5	13.5,13.5
30	1451	1484	1523	1484	1451	1484	1523	1484	20- 30	732.3	1403	28.2,28.2
40	1201	1242	1292	1242	1201	1242	1292	1242	30- 40	855.4	2258	45.4,45.4
50	937.6	978.0	1029	978.0	937.6	978.0	1029	978.0	40- 50	858.4	3117	62.7,62.7
60	669.6	703.7	747.4	703.7	669.6	703.7	747.4	703.7	50- 60	753.4	3870	77.9,77.9
70	408.9	431.7	461.5	431.7	408.9	431.7	461.5	431.7	60- 70	562.9	4433	89.2,89.2
80	168.7	176.6	186.8	176.6	168.7	176.6	186.8	176.6	70- 80	318.8	4752	95.6,95.6
90	12.77	14.57	15.77	14.57	12.77	14.57	15.77	14.57	80- 90	87.64	4839	97.4,97.4
100	12.67	13.13	13.61	13.13	12.67	13.13	13.61	13.13	90-100	13.37	4853	97.7,97.7
110	15.77	16.12	16.74	16.12	15.77	16.12	16.74	16.12	100-110	15.45	4868	98,98
120	19.27	19.45	19.92	19.45	19.27	19.45	19.92	19.45	110-120	17.66	4886	98.3,98.3
130	22.98	22.95	23.21	22.95	22.98	22.95	23.21	22.95	120-130	19.02	4905	98.7,98.7
140	26.43	26.42	26.75	26.42	26.43	26.42	26.75	26.42	130-140	19.12	4924	99.1,99.1
150	29.63	29.80	30.33	29.80	29.63	29.80	30.33	29.80	140-150	17.66	4942	99.4,99.4
160	32.83	32.99	33.67	32.99	32.83	32.99	33.67	32.99	150-160	14.53	4956	99.7,99.7
170	35.65	35.58	36.18	35.58	35.65	35.58	36.18	35.58	160-170	9.730	4966	99.9,99.9
180	36.35	36.43	37.01	36.43	36.35	36.43	37.01	36.43	170-180	3.451	4969	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.70V I:0.1720A P:39.100W PF:0.9760 Freq:50.00Hz		
Lamp Flux:4969.37x1 lm		
Name: NS50-1500MM-40W	Type: LED	
MFR.:	DIM.: 1500*50*75mm	
	SUR.: 1495*45mm	

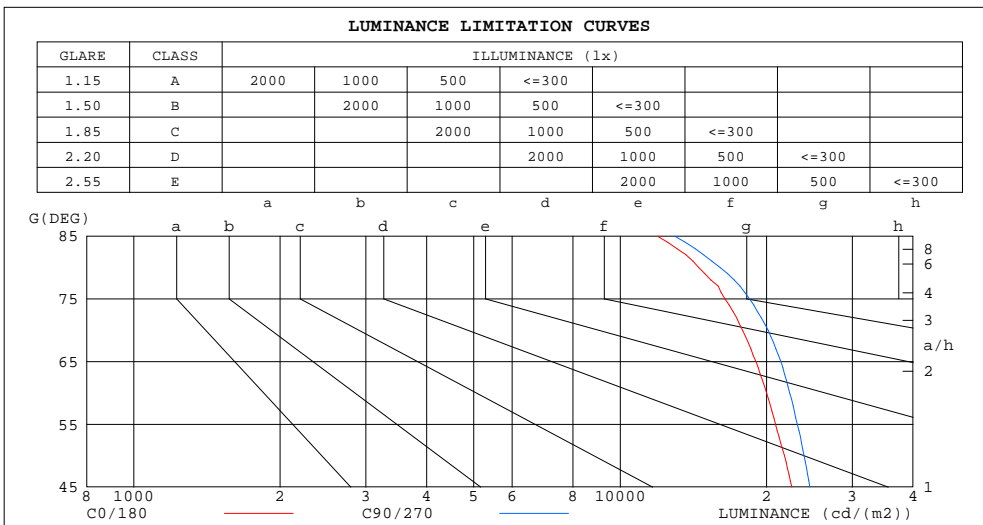

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	11930	12939
80	14501	16057
75	16423	18444
70	17845	20138
65	19017	21403
60	19988	22309
55	20880	23146
50	21770	23889
45	22538	24549


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.70V I:0.1720A P:39.100W PF:0.9760 Freq:50.00Hz		
Lamp Flux:4969.37x1 lm		
Name: NS50-1500MM-40W	Type: LED	
MFR.:	DIM.: 1500*50*75mm	
	SUR.: 1495*45mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.04	.99	.96	1.01	.97	.94	.96	.93	.90	.92	.90	.87	.88	.86	.84	.82
2.0	.91	.84	.78	.88	.82	.77	.84	.79	.75	.81	.77	.73	.77	.74	.71	.69
3.0	.80	.72	.65	.78	.70	.65	.75	.68	.63	.71	.66	.62	.69	.64	.60	.58
4.0	.71	.62	.55	.69	.61	.55	.66	.59	.54	.64	.58	.53	.61	.56	.52	.50
5.0	.63	.54	.48	.62	.54	.48	.60	.52	.47	.57	.51	.46	.55	.50	.45	.43
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.52	.45	.41	.50	.44	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.36	.47	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.47	.39	.33	.45	.38	.33	.44	.37	.32	.42	.36	.32	.30
9.0	.44	.35	.30	.43	.35	.30	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.40	.32	.27	.38	.32	.27	.37	.31	.27	.36	.30	.26	.25

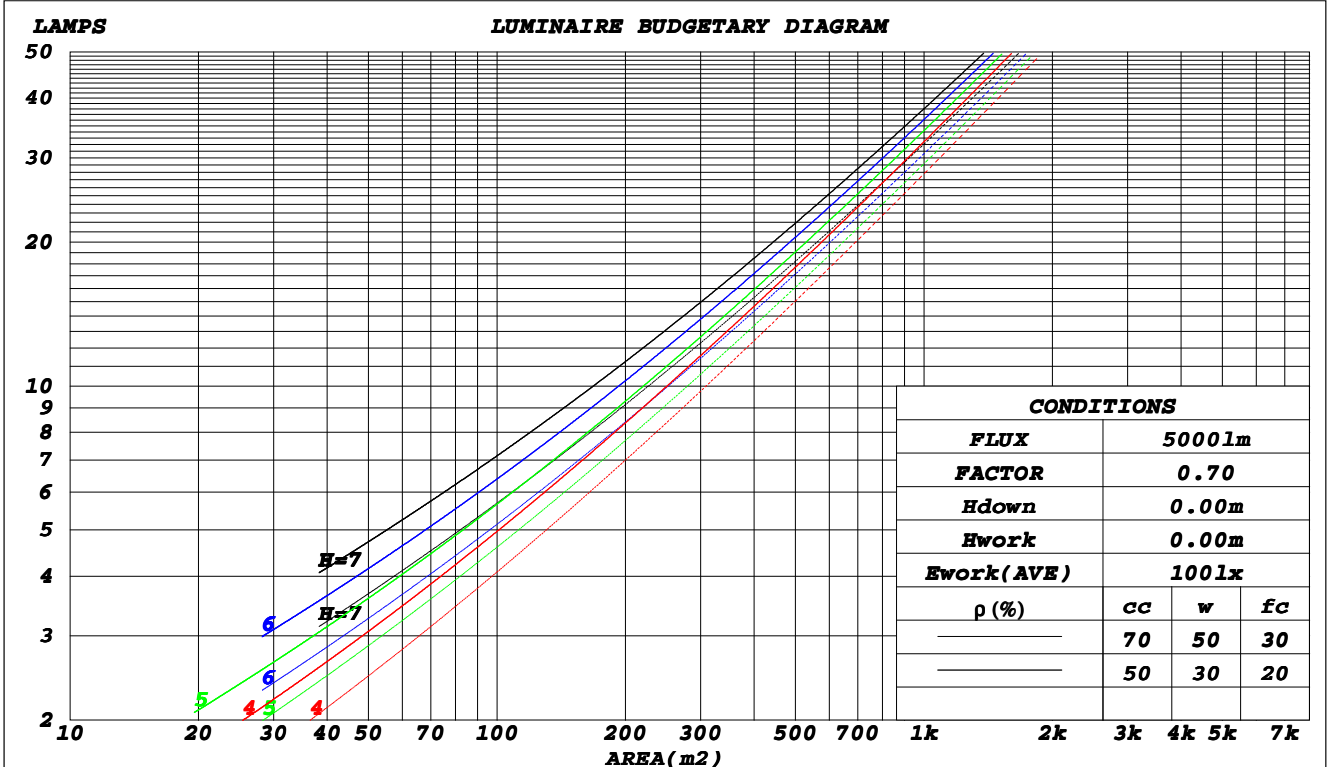

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:230.70V I:0.1720A P:39.100W PF:0.9760 Freq:50.00Hz		
Lamp Flux:4969.37x1 lm		
Name: NS50-1500MM-40W	Type: LED	
MFR.:	DIM.: 1500*50*75mm	
	SUR.: 1495*45mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.302	.172	.054	.294	.168	.053	.280	.160	.051	.266	.153	.049	.254	.147	.047	
2.0	.285	.156	.048	.278	.153	.047	.265	.147	.046	.253	.142	.044	.242	.137	.043	
3.0	.264	.140	.042	.258	.138	.042	.246	.133	.041	.235	.129	.040	.225	.125	.039	
4.0	.244	.127	.037	.238	.125	.037	.228	.121	.036	.218	.117	.035	.210	.114	.035	
5.0	.226	.115	.033	.221	.113	.033	.212	.110	.032	.203	.107	.032	.195	.104	.031	
6.0	.210	.105	.030	.205	.104	.030	.197	.101	.029	.189	.098	.029	.182	.096	.028	
7.0	.195	.097	.027	.191	.095	.027	.184	.093	.027	.177	.091	.026	.171	.089	.026	
8.0	.183	.089	.025	.179	.088	.025	.172	.086	.025	.166	.084	.024	.160	.082	.024	
9.0	.171	.083	.023	.168	.082	.023	.162	.080	.023	.156	.078	.022	.151	.077	.022	
10.0	.161	.077	.021	.158	.076	.021	.153	.075	.021	.148	.073	.021	.143	.072	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.210	.210	.210	.180	.180	.180	.123	.123	.123	.071	.071	.071	.023	.023	.023	
1.0	.200	.176	.155	.171	.151	.133	.117	.104	.092	.067	.060	.054	.022	.019	.017	
2.0	.192	.152	.119	.164	.131	.103	.112	.091	.072	.065	.053	.042	.021	.017	.014	
3.0	.184	.135	.096	.157	.116	.083	.108	.081	.058	.062	.047	.034	.020	.015	.011	
4.0	.176	.121	.080	.151	.105	.069	.104	.073	.049	.060	.043	.029	.019	.014	.009	
5.0	.169	.111	.068	.145	.096	.059	.100	.067	.042	.058	.039	.025	.019	.013	.008	
6.0	.161	.103	.060	.139	.089	.053	.096	.062	.037	.056	.037	.022	.018	.012	.007	
7.0	.155	.096	.054	.133	.083	.047	.092	.058	.034	.053	.034	.020	.017	.011	.007	
8.0	.148	.090	.050	.128	.078	.043	.088	.055	.031	.051	.032	.018	.017	.011	.006	
9.0	.142	.085	.046	.123	.074	.040	.085	.052	.029	.049	.031	.017	.016	.010	.006	
10.0	.137	.081	.043	.118	.070	.038	.082	.049	.027	.048	.029	.016	.015	.010	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.70V I:0.1720A P:39.100W PF:0.9760 Freq:50.00Hz		
Lamp Flux:4969.37x1 lm		
Name: NS50-1500MM-40W	Type: LED	
MFR.:	DIM.: 1500*50*75mm	
	SUR.: 1495*45mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.1	24.6	23.4	24.8	25.1	23.6	25.0	23.9	25.3	25.5
3H	24.5	25.9	24.9	26.1	26.4	25.1	26.4	25.4	26.7	27.0
4H	25.1	26.3	25.4	26.6	27.0	25.6	26.9	26.0	27.2	27.5
6H	25.5	26.7	25.8	27.0	27.3	26.0	27.2	26.4	27.6	27.9
8H	25.6	26.7	26.0	27.1	27.4	26.2	27.3	26.5	27.6	28.0
12H	25.6	26.8	26.0	27.1	27.4	26.2	27.3	26.6	27.7	28.0
4H 2H	23.7	25.0	24.1	25.3	25.6	24.1	25.4	24.4	25.7	26.0
3H	25.3	26.4	25.7	26.8	27.1	25.8	26.9	26.2	27.2	27.6
4H	26.0	27.0	26.4	27.4	27.8	26.5	27.5	26.9	27.9	28.2
6H	26.5	27.4	26.9	27.8	28.2	27.0	27.9	27.4	28.3	28.7
8H	26.7	27.5	27.1	27.9	28.4	27.2	28.0	27.6	28.4	28.9
12H	26.8	27.5	27.2	28.0	28.4	27.3	28.0	27.7	28.5	28.9
8H 4H	26.3	27.1	26.7	27.5	28.0	26.7	27.5	27.1	27.9	28.4
6H	26.9	27.6	27.4	28.1	28.5	27.3	28.0	27.8	28.5	29.0
8H	27.1	27.8	27.6	28.2	28.7	27.6	28.2	28.1	28.7	29.2
12H	27.3	27.8	27.8	28.3	28.9	27.8	28.3	28.3	28.8	29.3
12H 4H	26.3	27.0	26.7	27.5	27.9	26.7	27.5	27.2	27.9	28.3
6H	27.0	27.6	27.5	28.0	28.6	27.4	28.0	27.9	28.5	29.0
8H	27.2	27.8	27.8	28.3	28.8	27.7	28.2	28.2	28.7	29.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 4969 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.6)
 Area: 0.067 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.70V I:0.1720A P:39.100W PF:0.9760 Freq:50.00Hz Lamp Flux:4969.37x1 lm		
Name: NS50-1500MM-40W	Type: LED	
MFR.:	DIM.: 1500*50*75mm	
	SUR.: 1495*45mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	47	40	57	46	40	56	46	39	33
0.80	68	56	49	67	56	49	65	55	49	42
1.00	76	65	58	75	65	58	72	66	57	50
1.25	83	73	66	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	89	82	77	69
2.50	99	91	85	96	89	84	92	86	82	73
3.00	102	95	90	100	93	88	95	90	86	77
4.00	106	100	96	103	98	94	99	94	91	81
5.00	108	103	99	106	101	98	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.70V I:0.1720A P:39.100W PF:0.9760 Freq:50.00Hz		
Lamp Flux:4969.37x1 lm		
Name: NS50-1500MM-40W	Type: LED	
MFR.:	DIM.: 1500*50*75mm	
	SUR.: 1495*45mm	

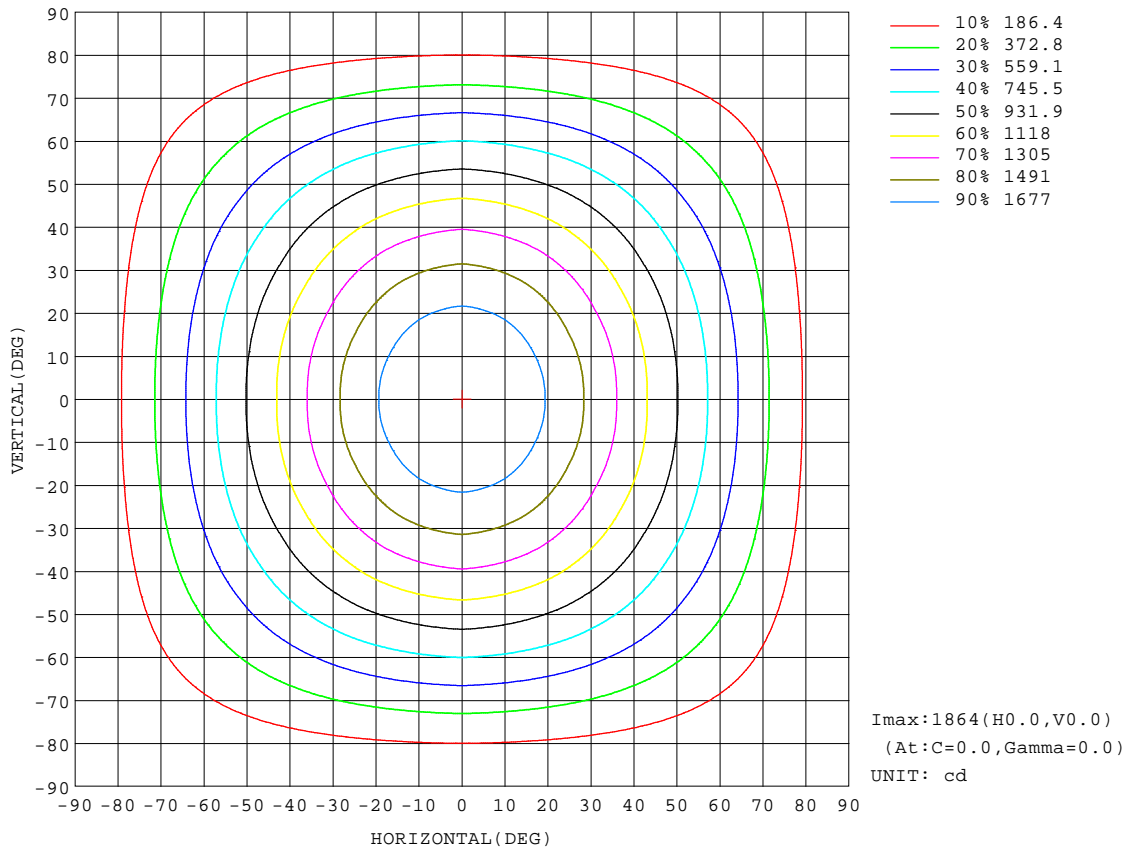


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:230.70V I:0.1720A P:39.100W PF:0.9760 Freq:50.00Hz		
Lamp Flux:4969.37x1 lm		
Name: NS50-1500MM-40W	Type: LED	
MFR.:	DIM.: 1500*50*75mm	
	SUR.: 1495*45mm	

Flux out:3198 lm

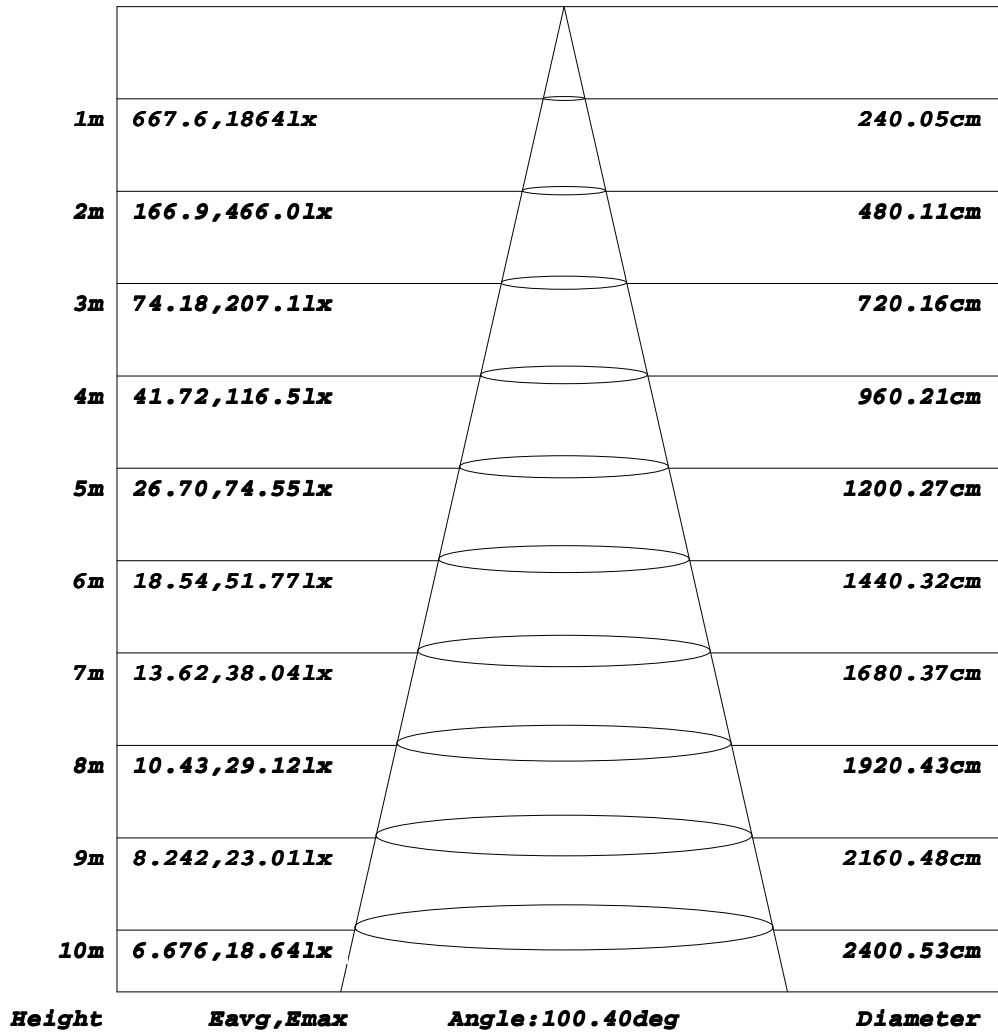


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:230.70V I:0.1720A P:39.100W PF:0.9760 Freq:50.00Hz		
Lamp Flux:4969.37x1 lm		
Name: NS50-1500MM-40W	Type: LED	
MFR.:	DIM.: 1500*50*75mm	
	SUR.: 1495*45mm	

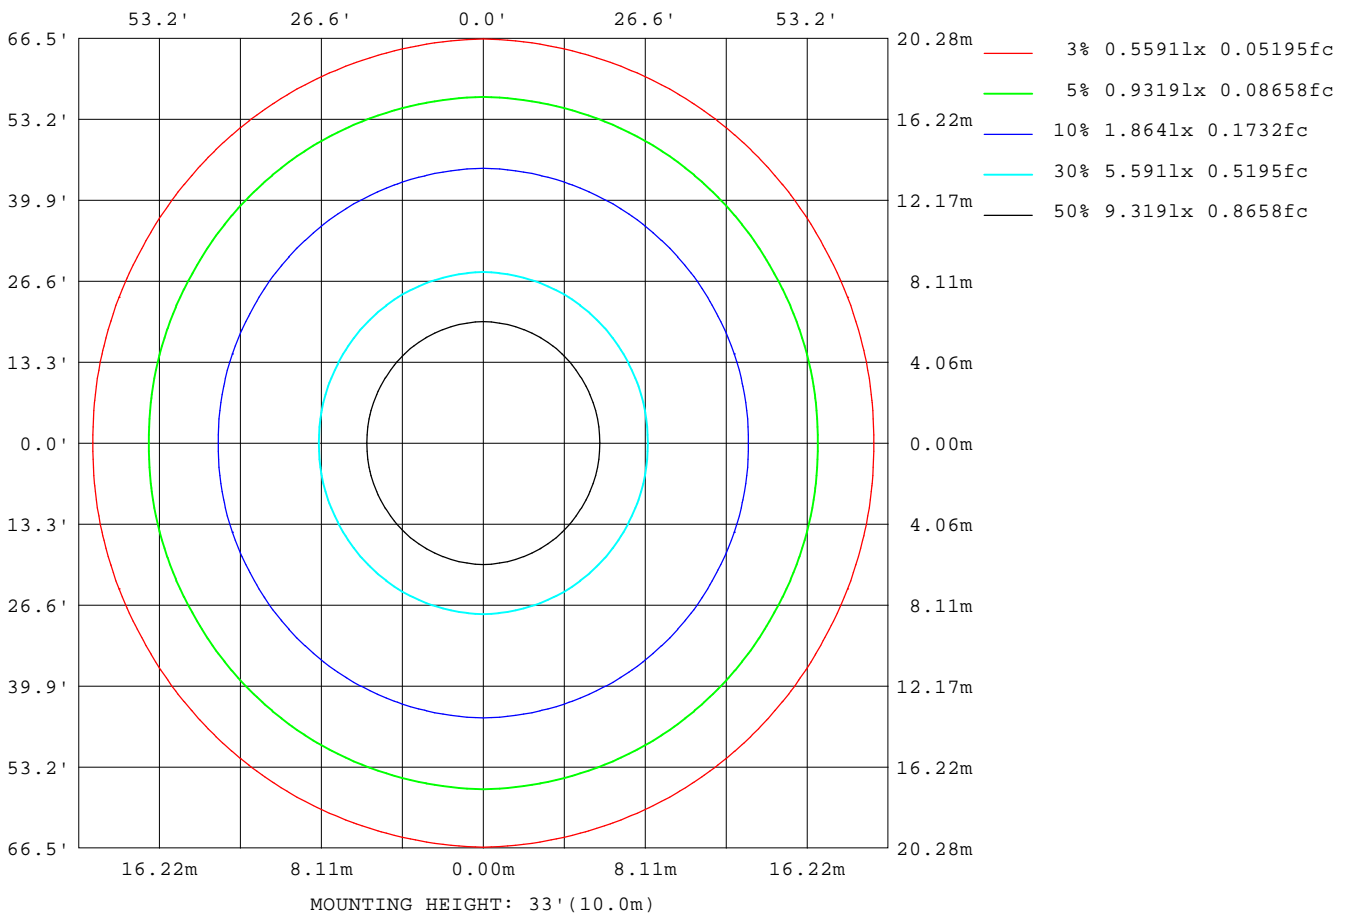

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

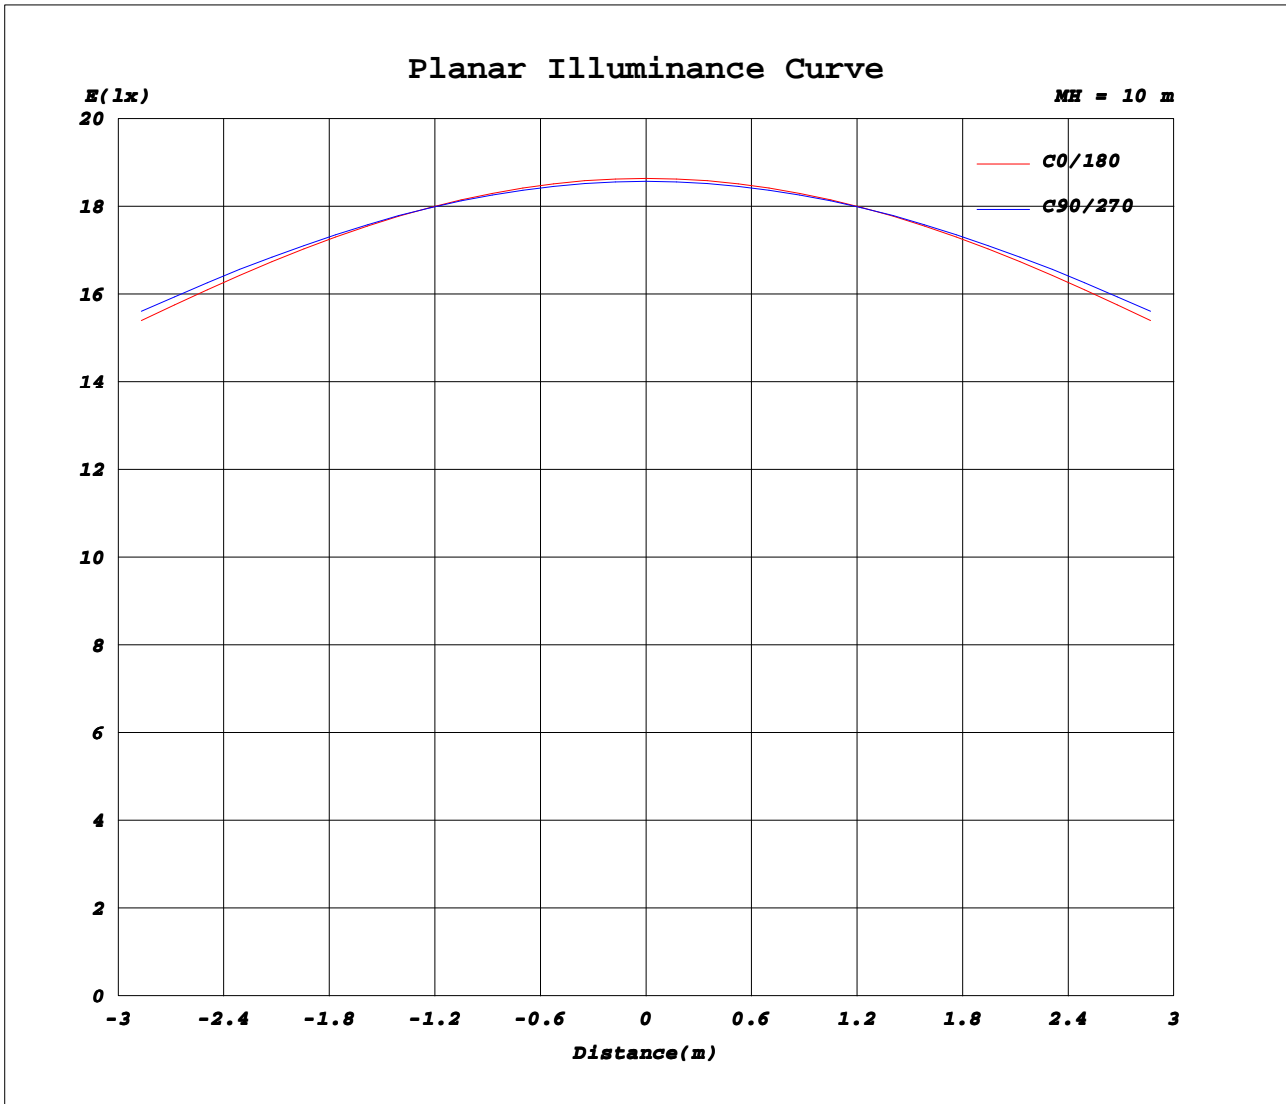

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.70V I:0.1720A P:39.100W PF:0.9760 Freq:50.00Hz		
Lamp Flux:4969.37x1 lm		
Name: NS50-1500MM-40W	Type: LED	
MFR.:	DIM.: 1500*50*75mm	
	SUR.: 1495*45mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1864	1859	1858	1857	1858	1859	1864	1859	1858	1857	1858	1859							
5	1851	1846	1847	1847	1847	1846	1851	1846	1847	1847	1847	1846							
10	1812	1810	1815	1817	1815	1810	1812	1810	1815	1817	1815	1810							
15	1748	1751	1763	1769	1763	1751	1748	1751	1763	1769	1763	1751							
20	1665	1672	1692	1703	1692	1672	1665	1672	1692	1703	1692	1672							
25	1565	1576	1604	1620	1604	1576	1565	1576	1604	1620	1604	1576							
30	1451	1466	1501	1523	1501	1466	1451	1466	1501	1523	1501	1466							
35	1329	1346	1387	1413	1387	1346	1329	1346	1387	1413	1387	1346							
40	1201	1219	1264	1292	1264	1219	1201	1219	1264	1292	1264	1219							
45	1068	1088	1134	1163	1134	1088	1068	1088	1134	1163	1134	1088							
50	938	954	1002	1029	1002	954	938	954	1002	1029	1002	954							
55	802	820	862	889	862	820	802	820	862	889	862	820							
60	670	685	723	747	723	685	670	685	723	747	723	685							
65	538	552	583	606	583	552	538	552	583	606	583	552							
70	409	420	443	461	443	420	409	420	443	461	443	420							
75	285	293	308	320	308	293	285	293	308	320	308	293							
80	169	173	180	187	180	173	169	173	180	187	180	173							
85	69.7	71.7	73.9	75.6	73.9	71.7	69.7	71.7	73.9	75.6	73.9	71.7							
90	12.8	14.1	15.0	15.8	15.0	14.1	12.8	14.1	15.0	15.8	15.0	14.1							
95	11.4	11.8	12.1	12.2	12.1	11.8	11.4	11.8	12.1	12.2	12.1	11.8							
100	12.7	12.9	13.3	13.6	13.3	12.9	12.7	12.9	13.3	13.6	13.3	12.9							
105	14.2	14.4	14.8	15.2	14.8	14.4	14.2	14.4	14.8	15.2	14.8	14.4							
110	15.8	15.9	16.3	16.7	16.3	15.9	15.8	15.9	16.3	16.7	16.3	15.9							
115	17.5	17.6	17.9	18.3	17.9	17.6	17.5	17.6	17.9	18.3	17.9	17.6							
120	19.3	19.4	19.5	19.9	19.5	19.4	19.3	19.4	19.5	19.9	19.5	19.4							
125	21.1	21.2	21.2	21.5	21.2	21.2	21.1	21.2	21.2	21.5	21.2	21.2							
130	23.0	23.0	22.9	23.2	22.9	23.0	23.0	23.0	22.9	23.2	22.9	23.0							
135	24.7	24.7	24.6	25.0	24.6	24.7	24.7	24.7	24.6	25.0	24.6	24.7							
140	26.4	26.5	26.4	26.7	26.4	26.5	26.4	26.5	26.4	26.7	26.4	26.5							
145	28.0	28.1	28.1	28.5	28.1	28.1	28.0	28.1	28.1	28.5	28.1	28.1							
150	29.6	29.7	29.9	30.3	29.9	29.7	29.6	29.7	29.9	30.3	29.9	29.7							
155	31.2	31.3	31.6	32.1	31.6	31.3	31.2	31.3	31.6	32.1	31.6	31.3							
160	32.8	32.8	33.2	33.7	33.2	32.8	32.8	32.8	33.2	33.7	33.2	32.8							
165	34.3	34.1	34.7	35.1	34.7	34.1	34.3	34.1	34.7	35.1	34.7	34.1							
170	35.6	35.3	35.9	36.2	35.9	35.3	35.6	35.3	35.9	36.2	35.9	35.3							
175	36.3	36.0	36.6	36.9	36.6	36.0	36.3	36.0	36.6	36.9	36.6	36.0							
180	36.4	36.1	36.8	37.0	36.8	36.1	36.4	36.1	36.8	37.0	36.8	36.1							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: