
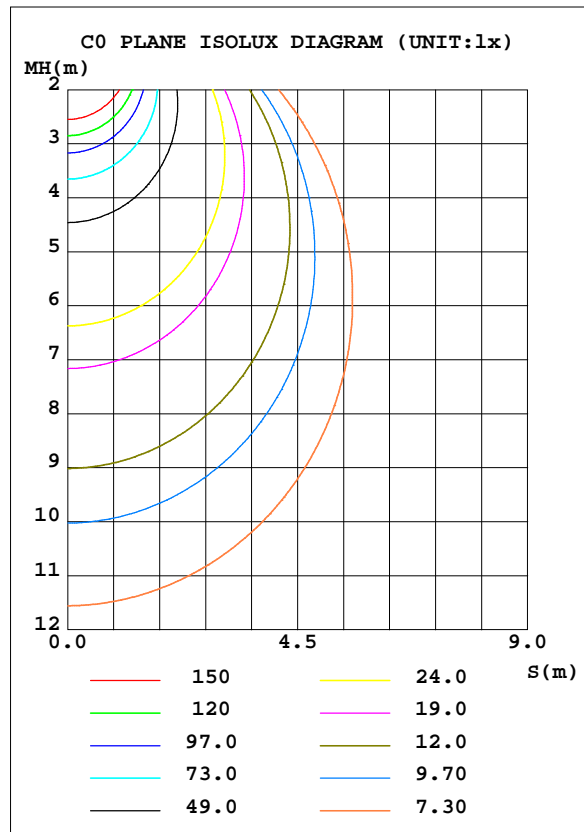


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.80V I:0.1010A P:21.000W PF:0.9320 Freq:50.00Hz		
Lamp Flux:2884.72x1 lm		
Name: NS60-2951195-20W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 137.37 lm/W			
MODEL		I _{max} (cd)	975.0	S/MH(C0/180)	1.25
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2884.7	η UP, DN(C0-180)	1.1,47.1
NOMINAL FLUX(lm)	2884.72	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.2,50.6
LAMPS INSIDE	1	η up(%)	2.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.8	CIBSE SHR MAX	1.35

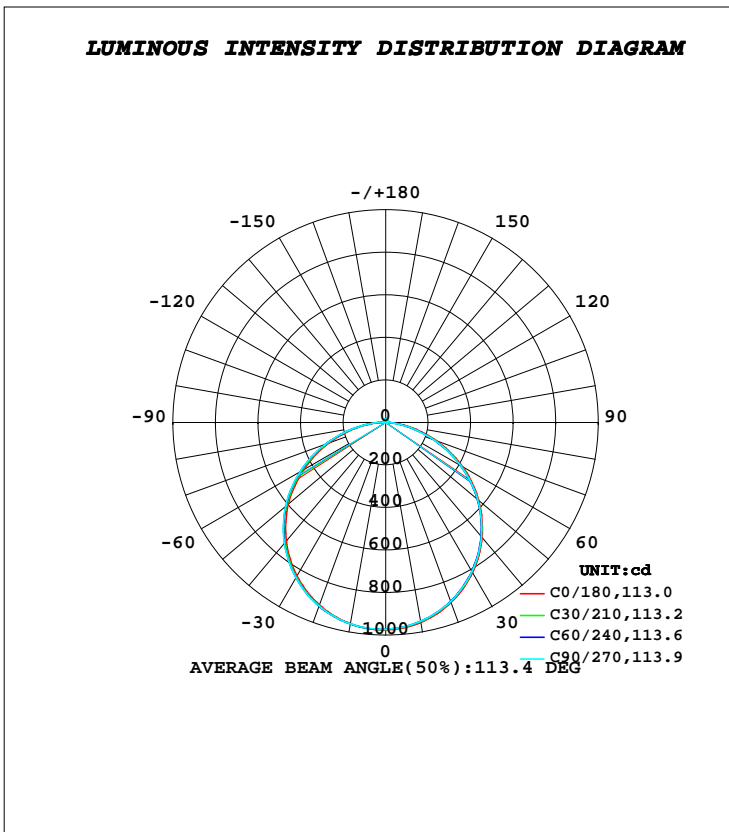

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	954.4	949.8	949.0	954.6	960.8	961.9	960.9	958.4	0- 10	92.09	92.09	3.19,3.19
20	900.9	895.0	894.6	903.1	912.8	917.6	918.4	912.2	10- 20	264.1	356.1	12.3,12.3
30	816.4	810.3	810.7	821.4	833.8	841.5	843.6	834.1	20- 30	401.2	757.3	26.3,26.3
40	705.2	698.7	699.6	712.3	727.1	737.8	741.3	728.8	30- 40	485.5	1243	43.1,43.1
50	571.9	563.5	564.4	580.3	598.8	610.8	614.3	599.5	40- 50	506.1	1749	60.6,60.6
60	418.9	408.3	408.3	425.1	445.4	460.5	466.3	450.2	50- 60	458.9	2208	76.5,76.5
70	256.8	242.7	241.5	261.0	284.3	299.0	303.7	287.6	60- 70	350.6	2558	88.7,88.7
80	103.5	89.09	87.33	106.1	128.1	138.6	140.5	127.5	70- 80	202.0	2760	95.7,95.7
90	4.870	4.416	5.185	7.577	11.00	17.01	20.62	15.56	80- 90	59.75	2820	97.8,97.8
100	6.423	6.345	6.513	7.109	7.711	7.926	7.850	7.311	90-100	7.572	2828	98,98
110	7.984	7.697	7.770	8.478	9.180	9.177	8.914	8.523	100-110	8.268	2836	98.3,98.3
120	9.479	9.078	9.089	9.832	10.56	10.41	10.04	9.766	110-120	9.034	2845	98.6,98.6
130	10.99	10.54	10.52	11.26	11.99	11.75	11.32	11.12	120-130	9.387	2854	99,99
140	12.27	12.04	12.09	12.64	13.17	13.05	12.75	12.52	130-140	9.180	2864	99.3,99.3
150	13.66	13.51	13.54	13.93	14.30	14.27	14.11	13.91	140-150	8.295	2872	99.6,99.6
160	15.19	15.04	15.02	15.25	15.49	15.47	15.38	15.30	150-160	6.731	2879	99.8,99.8
170	16.77	16.39	16.22	16.42	16.64	16.46	16.28	16.43	160-170	4.484	2883	99.9,99.9
180	17.12	16.81	16.69	16.92	17.15	16.91	16.67	16.79	170-180	1.592	2885	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.80V I:0.1010A P:21.000W PF:0.9320 Freq:50.00Hz		
Lamp Flux:2884.72x1 lm		
Name: NS60-2951195-20W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

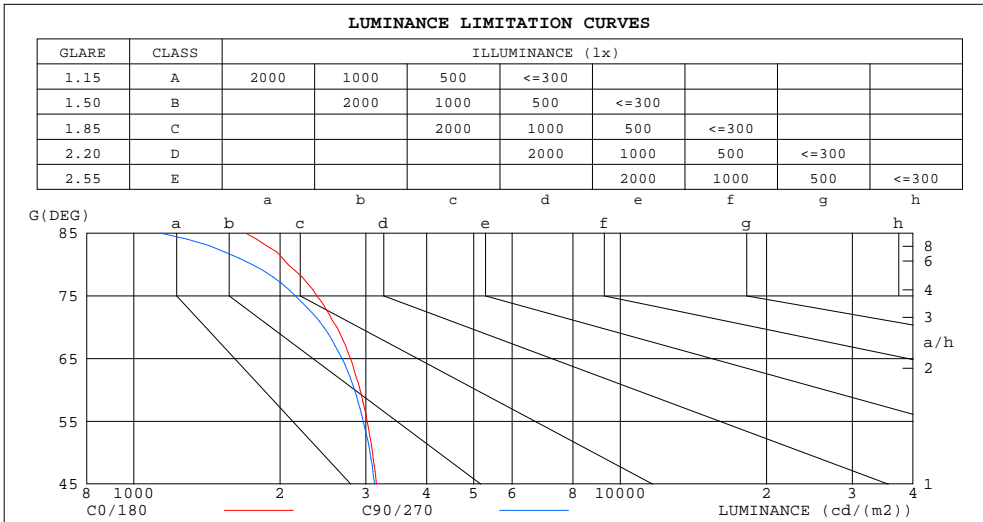

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1701	1136
80	2077	1752
75	2380	2150
70	2616	2460
65	2790	2682
60	2919	2845
55	3021	2963
50	3100	3059
45	3154	3128


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.80V I:0.1010A P:21.000W PF:0.9320 Freq:50.00Hz		
Lamp Flux:2884.72x1 lm		
Name: NS60-2951195-20W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.81
2.0	.90	.83	.77	.88	.81	.76	.84	.78	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.65	.60	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.54	.65	.58	.53	.63	.57	.52	.60	.55	.51	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.50	.45	.54	.48	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.36
7.0	.51	.42	.36	.50	.41	.35	.48	.40	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.36	.31	.42	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

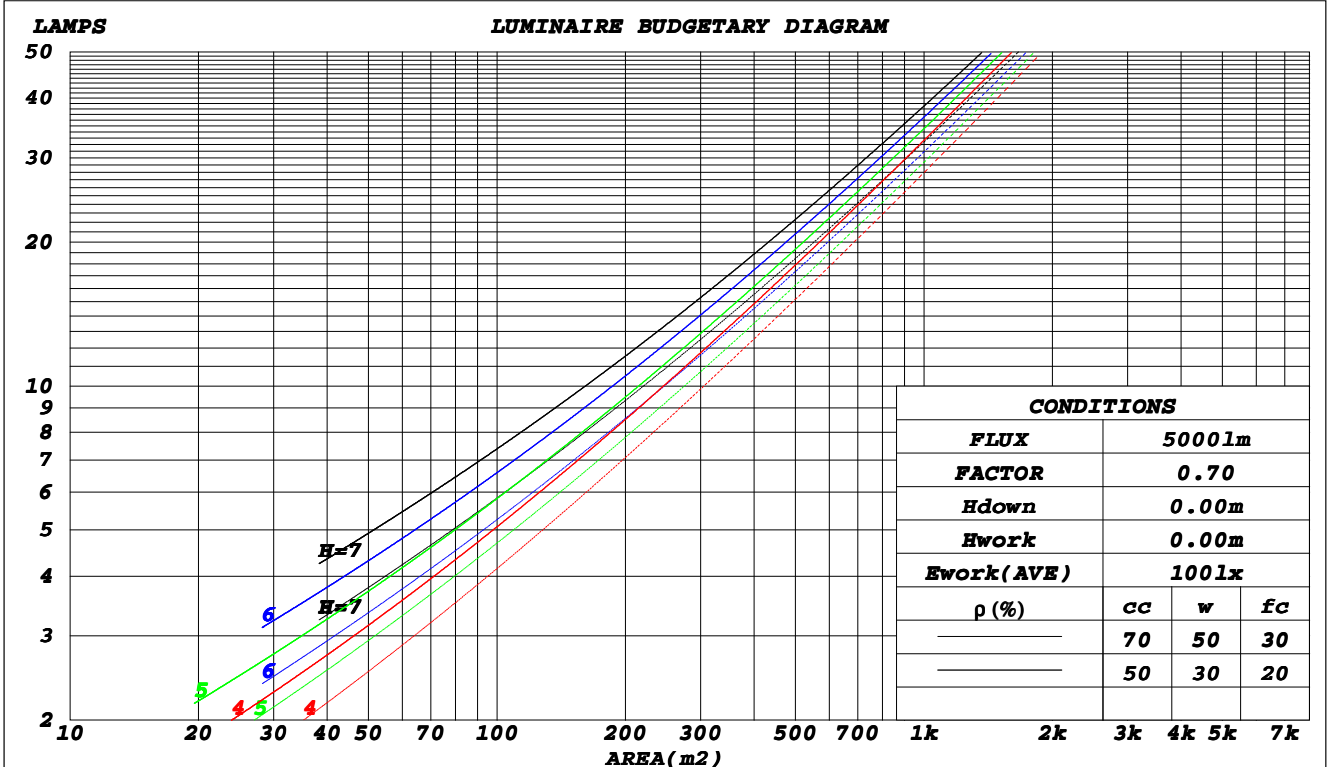

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.80V I:0.1010A P:21.000W PF:0.9320 Freq:50.00Hz		
Lamp Flux:2884.72x1 lm		
Name: NS60-2951195-20W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.312	.178	.056	.305	.174	.055	.290	.166	.053	.277	.160	.051	.264	.153	.049	
2.0	.293	.161	.049	.286	.158	.049	.273	.152	.047	.261	.147	.046	.250	.142	.045	
3.0	.271	.144	.043	.265	.142	.043	.253	.137	.042	.243	.133	.041	.233	.129	.040	
4.0	.250	.130	.038	.244	.128	.038	.234	.124	.037	.224	.121	.036	.216	.117	.036	
5.0	.231	.117	.034	.226	.116	.034	.217	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.214	.107	.031	.209	.106	.030	.201	.103	.030	.194	.101	.030	.187	.098	.029	
7.0	.199	.098	.028	.195	.097	.028	.188	.095	.027	.181	.093	.027	.174	.091	.027	
8.0	.186	.091	.026	.182	.090	.025	.176	.088	.025	.169	.086	.025	.164	.084	.024	
9.0	.174	.084	.023	.171	.083	.023	.165	.082	.023	.159	.080	.023	.154	.078	.023	
10.0	.163	.078	.022	.161	.078	.022	.155	.076	.021	.150	.075	.021	.145	.073	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.208	.208	.208	.177	.177	.177	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.198	.173	.151	.169	.149	.130	.116	.102	.090	.067	.059	.052	.021	.019	.017	
2.0	.190	.149	.115	.162	.128	.100	.111	.089	.069	.064	.052	.041	.021	.017	.013	
3.0	.182	.132	.092	.156	.114	.079	.107	.079	.056	.062	.046	.033	.020	.015	.011	
4.0	.174	.118	.076	.150	.102	.066	.103	.071	.046	.060	.042	.027	.019	.014	.009	
5.0	.167	.108	.065	.143	.094	.056	.099	.065	.040	.057	.038	.024	.018	.013	.008	
6.0	.160	.100	.057	.137	.086	.049	.095	.061	.035	.055	.036	.021	.018	.012	.007	
7.0	.153	.093	.051	.132	.081	.044	.091	.056	.031	.053	.033	.019	.017	.011	.006	
8.0	.147	.087	.046	.126	.076	.040	.087	.053	.029	.051	.031	.017	.016	.010	.006	
9.0	.141	.082	.043	.121	.071	.037	.084	.050	.027	.049	.030	.016	.016	.010	.005	
10.0	.135	.078	.040	.116	.068	.035	.081	.048	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.80V I:0.1010A P:21.000W PF:0.9320 Freq:50.00Hz		
Lamp Flux:2884.72x1 lm		
Name: NS60-2951195-20W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.4	17.9	16.7	18.2	18.4	16.3	17.8	16.6	18.1	18.3
3H	17.9	19.2	18.2	19.5	19.8	17.7	19.1	18.0	19.4	19.6
4H	18.4	19.7	18.8	20.0	20.3	18.2	19.5	18.5	19.8	20.1
6H	18.8	20.0	19.2	20.4	20.7	18.5	19.7	18.9	20.1	20.4
8H	18.9	20.1	19.3	20.4	20.8	18.6	19.8	18.9	20.1	20.4
12H	19.0	20.1	19.4	20.5	20.8	18.6	19.7	19.0	20.1	20.4
4H 2H	17.0	18.3	17.3	18.6	18.9	16.9	18.2	17.2	18.5	18.8
3H	18.6	19.7	19.0	20.1	20.4	18.4	19.6	18.8	19.9	20.3
4H	19.2	20.3	19.7	20.7	21.0	19.0	20.1	19.5	20.5	20.8
6H	19.7	20.7	20.2	21.1	21.5	19.4	20.4	19.9	20.8	21.2
8H	19.9	20.8	20.3	21.2	21.6	19.6	20.4	20.0	20.8	21.3
12H	20.0	20.8	20.5	21.2	21.7	19.6	20.4	20.1	20.8	21.3
8H 4H	19.4	20.3	19.9	20.7	21.1	19.3	20.1	19.7	20.5	21.0
6H	20.0	20.8	20.5	21.2	21.7	19.8	20.5	20.3	20.9	21.4
8H	20.3	20.9	20.8	21.4	21.9	19.9	20.6	20.4	21.0	21.5
12H	20.4	21.0	20.9	21.5	22.0	20.0	20.6	20.5	21.1	21.6
12H 4H	19.4	20.2	19.9	20.7	21.1	19.3	20.0	19.7	20.5	20.9
6H	20.1	20.7	20.6	21.2	21.7	19.8	20.4	20.3	20.9	21.4
8H	20.3	20.9	20.8	21.4	21.9	20.0	20.5	20.5	21.0	21.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 2885 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.7)
 Area: 0.287 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.80V I:0.1010A P:21.000W PF:0.9320 Freq:50.00Hz		
Lamp Flux:2884.72x1 lm		
Name: NS60-2951195-20W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	54	44	38	31
0.80	67	55	47	65	54	47	63	53	47	40
1.00	75	64	56	74	63	56	71	64	55	48
1.25	82	71	64	80	71	64	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	88	81	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	94	89	99	93	88	95	89	85	76
4.00	105	100	95	103	98	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.80V I:0.1010A P:21.000W PF:0.9320 Freq:50.00Hz		
Lamp Flux:2884.72x1 lm		
Name: NS60-2951195-20W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

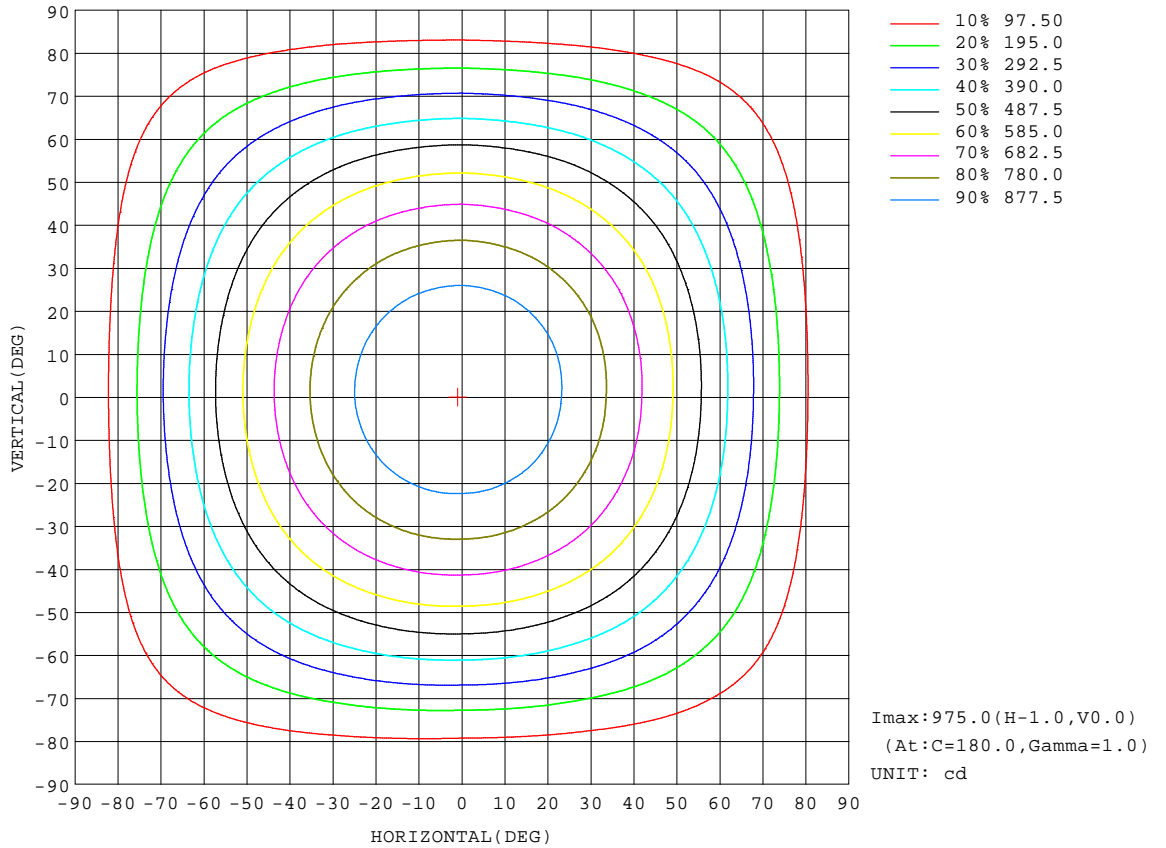


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.80V I:0.1010A P:21.000W PF:0.9320 Freq:50.00Hz		
Lamp Flux:2884.72x1 lm		
Name: NS60-2951195-20W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

Flux out:2079 lm

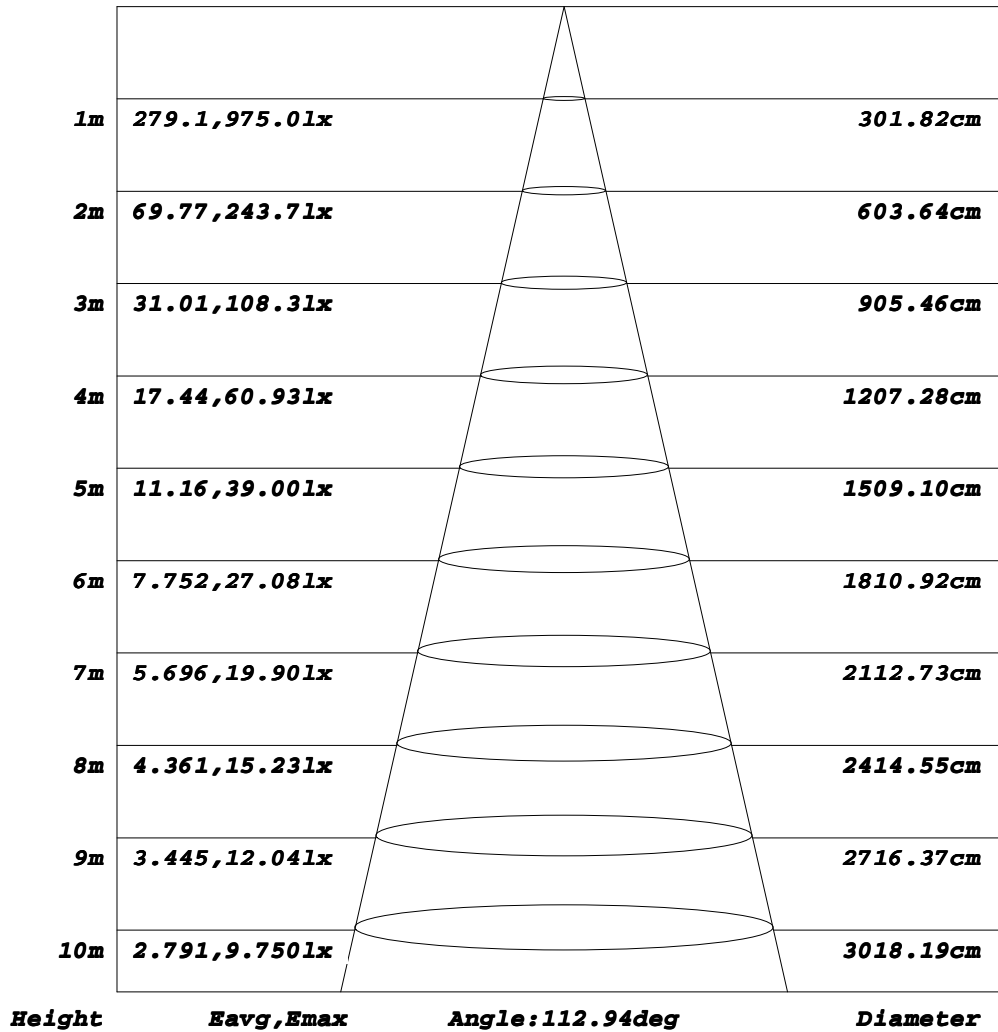


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:


ISOLUX DIAGRAM

Test:U:221.80V I:0.1010A P:21.000W PF:0.9320 Freq:50.00Hz		
Lamp Flux:2884.72x1 lm		
Name: NS60-2951195-20W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

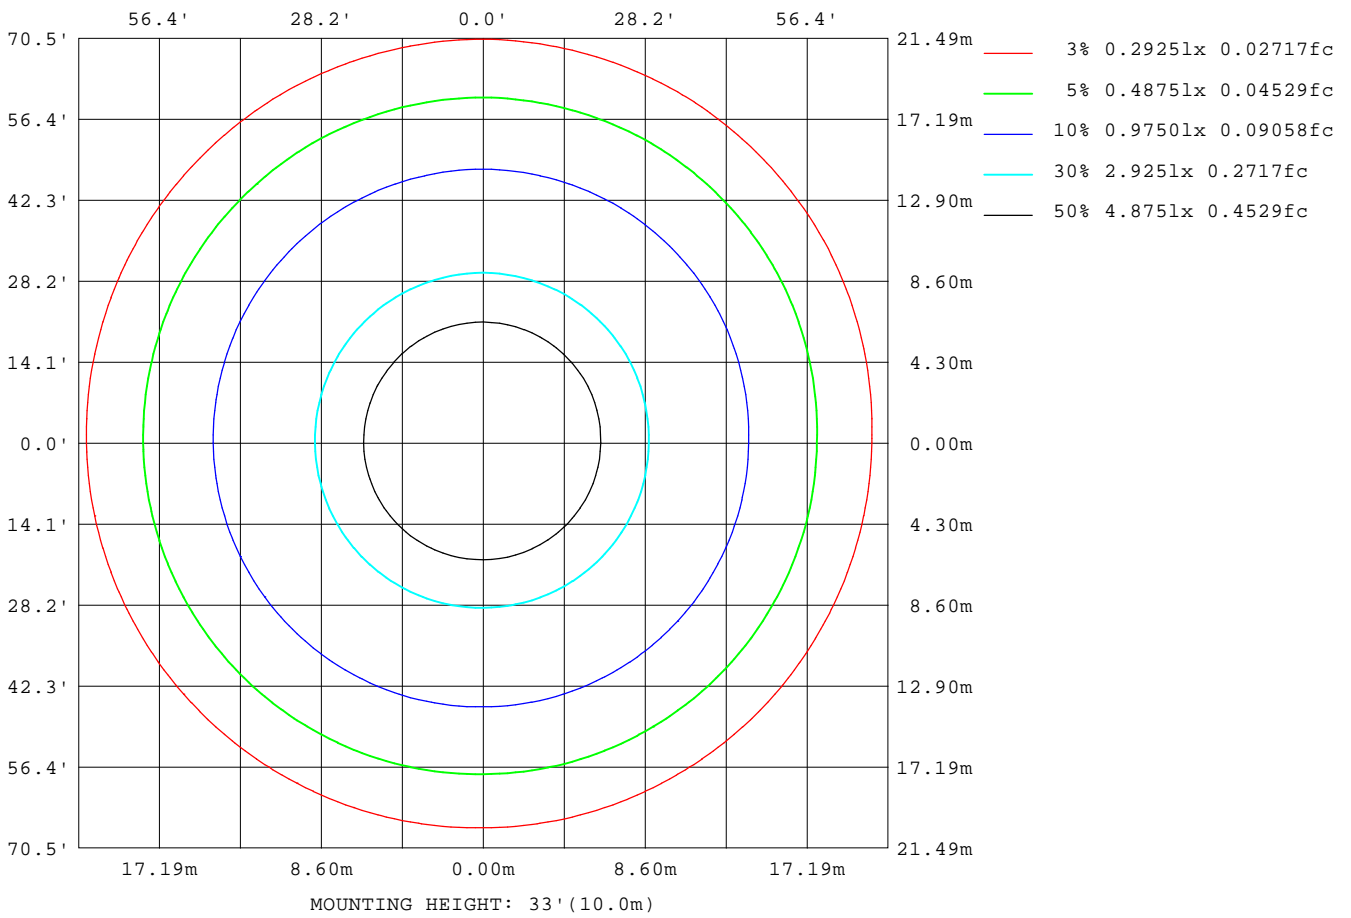

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

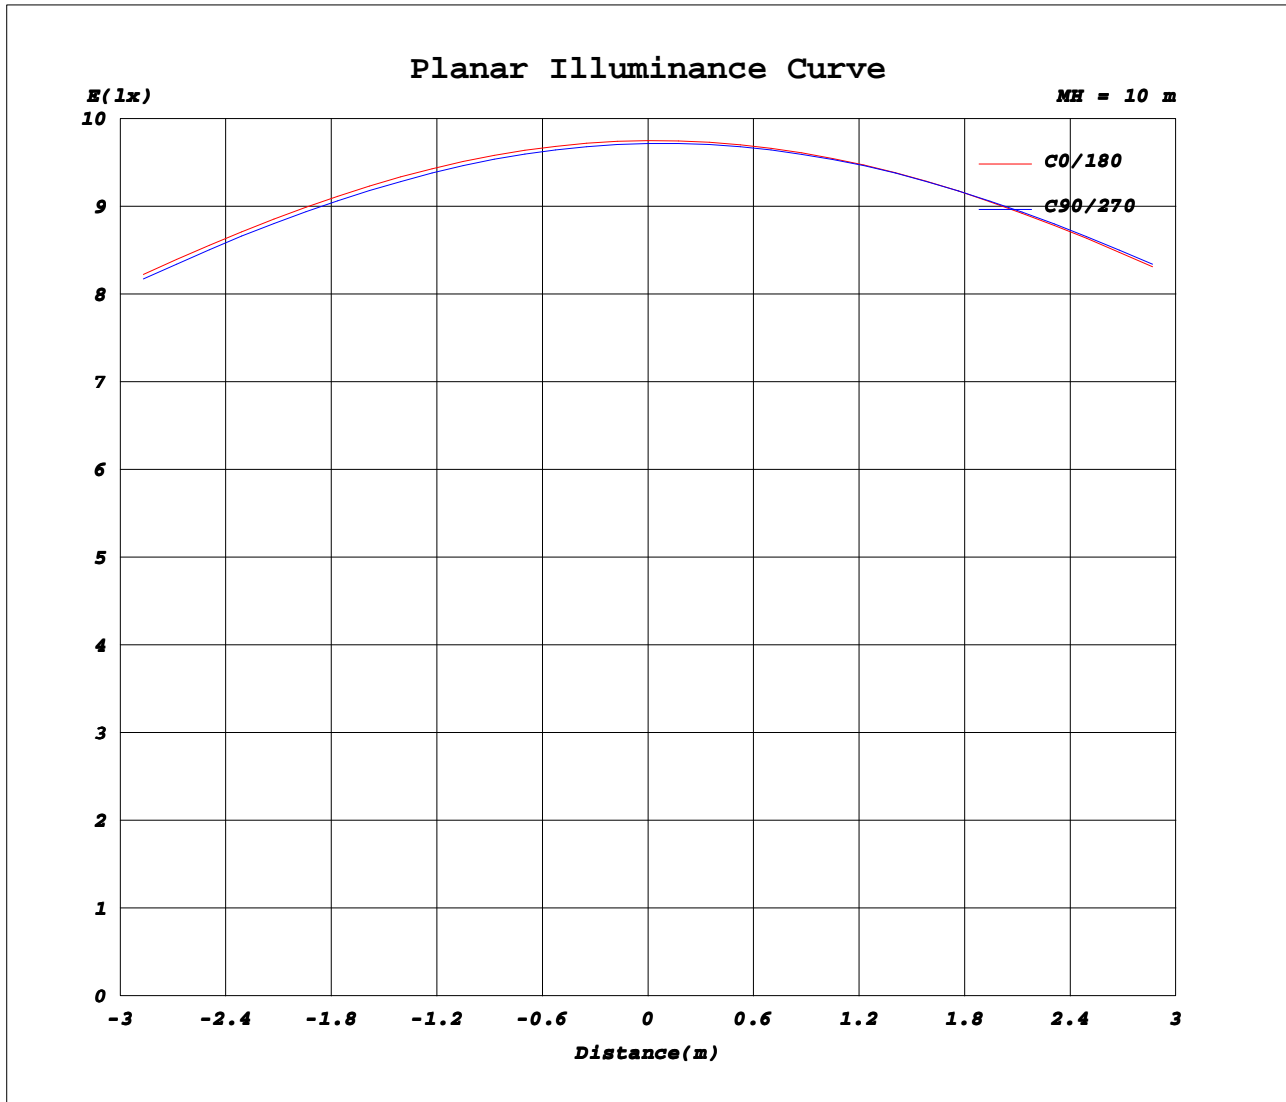Planar Illuminance Curve

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.80V I:0.1010A P:21.000W PF:0.9320 Freq:50.00Hz		
Lamp Flux:2884.72x1 lm		
Name: NS60-2951195-20W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	975	973	972	972	973	974	975	974	973	972	972	973							
5	969	966	965	965	967	970	972	972	971	970	970	970							
10	954	951	949	949	952	957	961	962	962	961	959	957							
15	932	927	925	926	930	935	941	943	944	943	941	937							
20	901	896	894	895	900	906	913	917	919	918	915	909							
25	862	857	855	856	862	870	877	882	885	885	881	873							
30	816	811	809	811	817	825	834	840	843	844	839	830							
35	764	759	757	759	766	775	784	791	795	796	790	779							
40	705	700	698	700	707	717	727	735	740	741	735	723							
45	640	634	633	635	644	654	665	674	680	681	673	660							
50	572	565	562	564	574	586	599	608	614	614	607	592							
55	497	489	486	488	497	510	523	533	541	543	535	520							
60	419	410	407	408	419	432	445	457	464	466	458	442							
65	338	328	324	325	336	351	365	377	385	387	379	362							
70	257	245	240	241	253	269	284	295	302	304	295	280							
75	177	164	159	160	172	188	204	213	219	219	212	198							
80	103	91.8	86.4	87.3	98.8	113	128	136	141	140	134	121							
85	42.5	32.5	27.8	28.4	38.0	50.1	62.3	68.7	71.9	71.4	66.0	56.4							
90	4.87	4.36	4.47	5.19	6.60	8.56	11.0	15.2	18.8	20.6	18.2	12.9							
95	5.63	5.60	5.68	5.86	6.23	6.63	7.00	7.23	7.32	7.24	6.91	6.37							
100	6.42	6.33	6.36	6.51	6.90	7.32	7.71	7.90	7.95	7.85	7.55	7.07							
105	7.23	7.04	7.02	7.14	7.56	8.03	8.46	8.58	8.57	8.41	8.14	7.75							
110	7.98	7.73	7.66	7.77	8.22	8.73	9.18	9.23	9.13	8.91	8.68	8.37							
115	8.71	8.41	8.31	8.41	8.88	9.41	9.86	9.86	9.70	9.45	9.24	8.99							
120	9.48	9.14	9.01	9.09	9.56	10.1	10.6	10.5	10.3	10.0	9.86	9.67							
125	10.3	9.88	9.72	9.79	10.3	10.8	11.3	11.2	11.0	10.7	10.5	10.4							
130	11.0	10.6	10.5	10.5	11.0	11.5	12.0	11.9	11.6	11.3	11.2	11.1							
135	11.6	11.3	11.2	11.3	11.7	12.2	12.6	12.5	12.3	12.0	11.9	11.7							
140	12.3	12.1	12.0	12.1	12.4	12.8	13.2	13.1	13.0	12.8	12.6	12.4							
145	13.0	12.8	12.7	12.8	13.1	13.5	13.7	13.7	13.6	13.4	13.3	13.1							
150	13.7	13.5	13.5	13.5	13.8	14.1	14.3	14.3	14.2	14.1	14.0	13.8							
155	14.4	14.3	14.2	14.3	14.5	14.7	14.9	14.9	14.9	14.8	14.7	14.6							
160	15.2	15.1	15.0	15.0	15.2	15.3	15.5	15.5	15.5	15.4	15.3	15.3							
165	16.0	15.8	15.7	15.7	15.8	16.0	16.1	16.0	16.0	15.9	15.9	15.9							
170	16.8	16.5	16.3	16.2	16.3	16.5	16.6	16.5	16.4	16.3	16.3	16.5							
175	17.1	16.8	16.6	16.6	16.8	17.0	17.1	16.9	16.7	16.5	16.6	16.8							
180	17.1	16.9	16.7	16.7	16.8	17.0	17.1	17.0	16.8	16.7	16.7	16.9							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: