
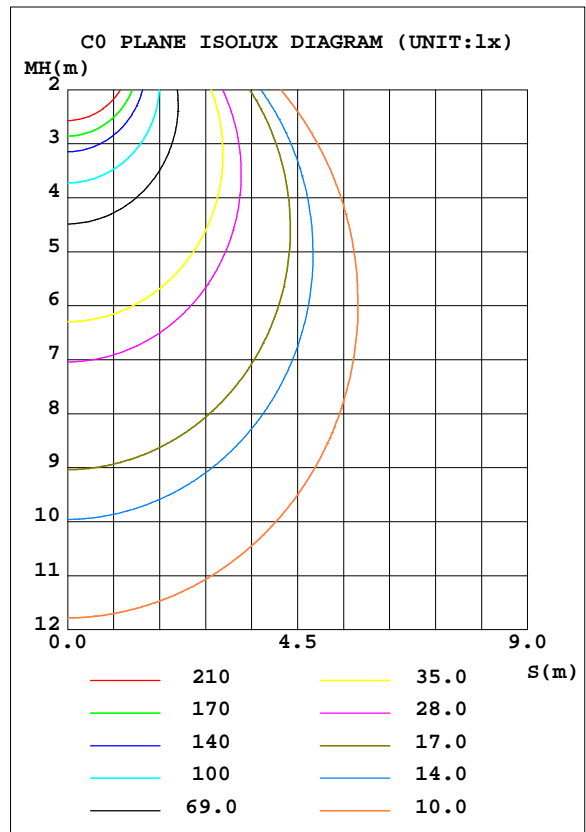


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.80V I:0.1410A P:30.200W PF:0.9620 Freq:50.00Hz		
Lamp Flux:4112.68x1 lm		
Name: NS60-2951195-30W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 136.18 lm/W			
MODEL		I _{max} (cd)	1388	S/MH(C0/180)	1.25
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	4112.7	η UP, DN(C0-180)	1.1,47.1
NOMINAL FLUX(lm)	4112.68	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.2,50.7
LAMPS INSIDE	1	η up(%)	2.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.8	CIBSE SHR MAX	1.35

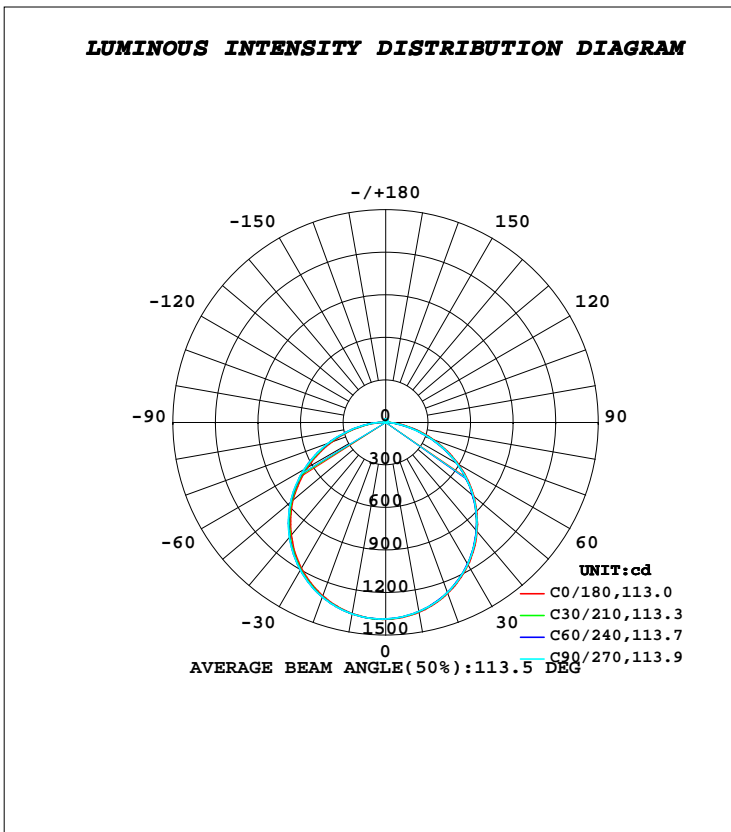

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1359	1354	1353	1360	1368	1370	1370	1366	0- 10	131.2	131.2	3.19,3.19
20	1282	1275	1275	1287	1300	1308	1310	1300	10- 20	376.3	507.5	12.3,12.3
30	1161	1154	1156	1171	1188	1200	1203	1189	20- 30	571.6	1079	26.2,26.2
40	1003	995.4	997.6	1015	1036	1052	1057	1039	30- 40	691.8	1771	43.1,43.1
50	812.7	802.0	804.2	827.4	854.1	871.7	876.6	854.3	40- 50	721.1	2492	60.6,60.6
60	595.0	581.9	583.3	608.2	637.5	658.1	665.0	640.8	50- 60	654.5	3147	76.5,76.5
70	364.1	345.2	344.3	372.3	405.5	426.4	432.9	409.2	60- 70	500.0	3647	88.7,88.7
80	146.2	126.3	124.5	151.9	183.7	198.3	200.4	181.2	70- 80	288.2	3935	95.7,95.7
90	6.996	6.250	7.443	11.37	16.61	24.46	28.87	21.72	80- 90	85.38	4020	97.8,97.8
100	9.223	9.120	9.359	10.19	11.03	11.34	11.24	10.48	90-100	10.89	4031	98,98
110	11.45	11.04	11.14	12.14	13.14	13.14	12.78	12.22	100-110	11.85	4043	98.3,98.3
120	13.62	13.02	13.03	14.08	15.12	14.91	14.39	14.00	110-120	12.94	4056	98.6,98.6
130	15.77	15.11	15.07	16.12	17.14	16.82	16.22	15.94	120-130	13.45	4069	98.9,98.9
140	17.59	17.24	17.30	18.07	18.82	18.65	18.24	17.93	130-140	13.14	4082	99.3,99.3
150	19.55	19.35	19.40	19.93	20.44	20.41	20.19	19.91	140-150	11.87	4094	99.6,99.6
160	21.74	21.52	21.50	21.80	22.11	22.11	22.02	21.90	150-160	9.630	4104	99.8,99.8
170	23.97	23.43	23.19	23.46	23.76	23.53	23.30	23.51	160-170	6.411	4110	99.9,99.9
180	24.48	24.04	23.88	24.19	24.49	24.18	23.87	24.03	170-180	2.275	4113	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.80V I:0.1410A P:30.200W PF:0.9620 Freq:50.00Hz		
Lamp Flux:4112.68x1 lm		
Name: NS60-2951195-30W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

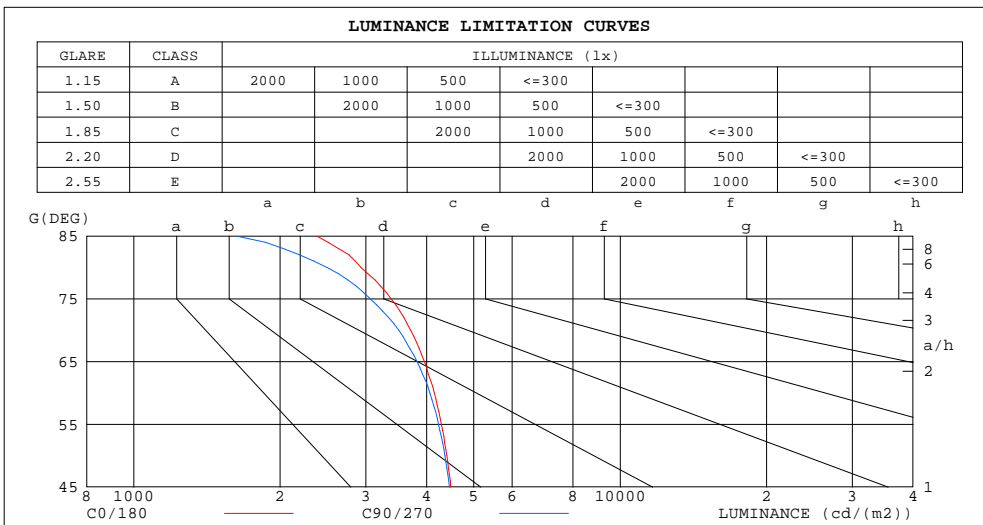

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2379	1630
80	2933	2498
75	3381	3064
70	3709	3507
65	3961	3826
60	4147	4065
55	4291	4235
50	4406	4359
45	4484	4458


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.80V I:0.1410A P:30.200W PF:0.9620 Freq:50.00Hz		
Lamp Flux:4112.68x1 lm		
Name: NS60-2951195-30W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.81
2.0	.90	.83	.77	.88	.81	.76	.84	.78	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.65	.60	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.53	.65	.58	.52	.63	.57	.52	.60	.55	.51	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.50	.45	.54	.48	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.36
7.0	.51	.42	.36	.50	.41	.35	.48	.40	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.36	.31	.42	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

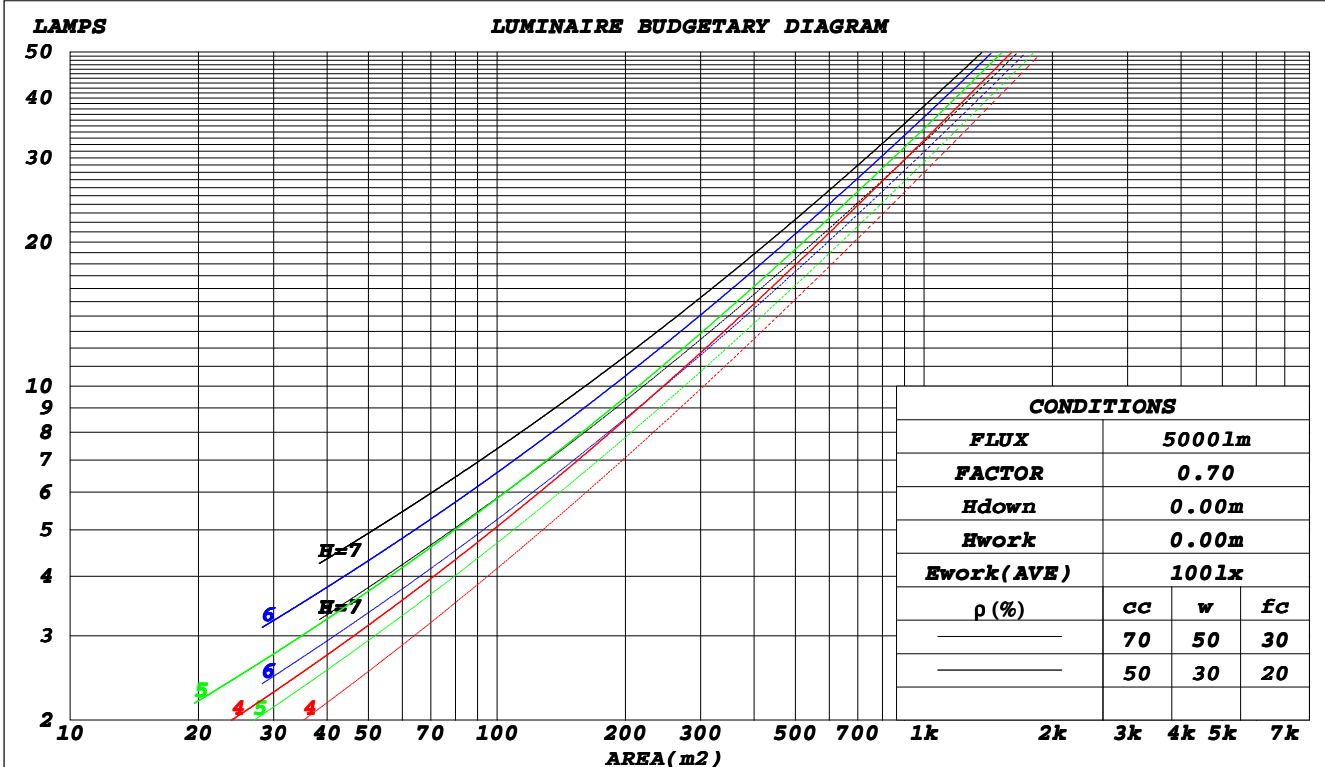

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.80V I:0.1410A P:30.200W PF:0.9620 Freq:50.00Hz		
Lamp Flux:4112.68x1 lm		
Name: NS60-2951195-30W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.312	.178	.056	.305	.174	.055	.290	.166	.053	.277	.160	.051	.264	.153	.049	
2.0	.293	.161	.049	.286	.158	.049	.273	.152	.047	.261	.147	.046	.250	.142	.045	
3.0	.271	.144	.043	.265	.142	.043	.253	.137	.042	.243	.133	.041	.233	.129	.040	
4.0	.250	.130	.038	.244	.128	.038	.234	.124	.037	.225	.121	.036	.216	.117	.036	
5.0	.231	.118	.034	.226	.116	.034	.217	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.214	.107	.031	.209	.106	.030	.201	.103	.030	.194	.101	.030	.187	.098	.029	
7.0	.199	.098	.028	.195	.097	.028	.188	.095	.027	.181	.093	.027	.174	.091	.027	
8.0	.186	.091	.026	.182	.090	.025	.176	.088	.025	.169	.086	.025	.164	.084	.024	
9.0	.174	.084	.023	.171	.083	.023	.165	.082	.023	.159	.080	.023	.154	.078	.023	
10.0	.164	.078	.022	.161	.078	.022	.155	.076	.021	.150	.075	.021	.145	.073	.021	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.208	.208	.208	.177	.177	.177	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.198	.173	.151	.169	.149	.130	.116	.102	.090	.067	.059	.052	.021	.019	.017	
2.0	.190	.149	.115	.163	.129	.100	.111	.089	.069	.064	.052	.041	.021	.017	.013	
3.0	.182	.132	.092	.156	.114	.079	.107	.079	.056	.062	.046	.033	.020	.015	.011	
4.0	.175	.119	.076	.150	.102	.066	.103	.071	.046	.060	.042	.027	.019	.014	.009	
5.0	.167	.108	.065	.144	.094	.056	.099	.065	.040	.057	.038	.024	.018	.013	.008	
6.0	.160	.100	.057	.137	.087	.049	.095	.061	.035	.055	.036	.021	.018	.012	.007	
7.0	.153	.093	.051	.132	.081	.044	.091	.057	.031	.053	.033	.019	.017	.011	.006	
8.0	.147	.087	.046	.126	.076	.041	.087	.053	.029	.051	.031	.017	.016	.010	.006	
9.0	.141	.082	.043	.121	.071	.037	.084	.050	.027	.049	.030	.016	.016	.010	.005	
10.0	.135	.078	.040	.116	.068	.035	.081	.048	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.80V I:0.1410A P:30.200W PF:0.9620 Freq:50.00Hz		
Lamp Flux:4112.68x1 lm		
Name: NS60-2951195-30W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.6	19.1	17.9	19.4	19.6	17.6	19.1	17.9	19.3	19.6
3H	19.1	20.5	19.4	20.7	21.0	18.9	20.3	19.3	20.6	20.9
4H	19.6	20.9	20.0	21.2	21.5	19.4	20.7	19.8	21.0	21.3
6H	20.0	21.2	20.4	21.6	21.9	19.7	21.0	20.1	21.3	21.6
8H	20.1	21.3	20.5	21.6	22.0	19.8	21.0	20.2	21.3	21.7
12H	20.2	21.3	20.6	21.7	22.0	19.8	21.0	20.2	21.3	21.6
4H 2H	18.2	19.5	18.5	19.8	20.1	18.1	19.4	18.5	19.7	20.0
3H	19.8	20.9	20.2	21.3	21.6	19.7	20.8	20.1	21.2	21.5
4H	20.5	21.5	20.9	21.9	22.3	20.3	21.3	20.7	21.7	22.1
6H	20.9	21.9	21.4	22.3	22.7	20.7	21.6	21.1	22.0	22.4
8H	21.1	22.0	21.5	22.4	22.8	20.8	21.6	21.2	22.1	22.5
12H	21.2	22.0	21.7	22.4	22.9	20.8	21.6	21.3	22.0	22.5
8H 4H	20.6	21.5	21.1	21.9	22.4	20.5	21.3	20.9	21.8	22.2
6H	21.3	22.0	21.7	22.4	22.9	21.0	21.7	21.5	22.2	22.6
8H	21.5	22.1	22.0	22.6	23.1	21.2	21.8	21.7	22.3	22.8
12H	21.6	22.2	22.1	22.7	23.2	21.2	21.8	21.8	22.3	22.8
12H 4H	20.6	21.4	21.1	21.9	22.3	20.5	21.3	20.9	21.7	22.2
6H	21.3	21.9	21.8	22.4	22.9	21.0	21.7	21.5	22.1	22.6
8H	21.5	22.1	22.0	22.6	23.1	21.2	21.8	21.7	22.3	22.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 4113 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.9)
 Area: 0.287 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.80V I:0.1410A P:30.200W PF:0.9620 Freq:50.00Hz Lamp Flux:4112.68x1 lm		
Name: NS60-2951195-30W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	54	44	38	31
0.80	67	55	47	65	54	47	63	53	47	40
1.00	75	64	56	74	63	56	71	64	55	48
1.25	82	71	64	80	71	64	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	88	81	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	94	89	99	93	88	95	89	85	76
4.00	105	100	95	103	98	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.80V I:0.1410A P:30.200W PF:0.9620 Freq:50.00Hz		
Lamp Flux:4112.68x1 lm		
Name: NS60-2951195-30W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

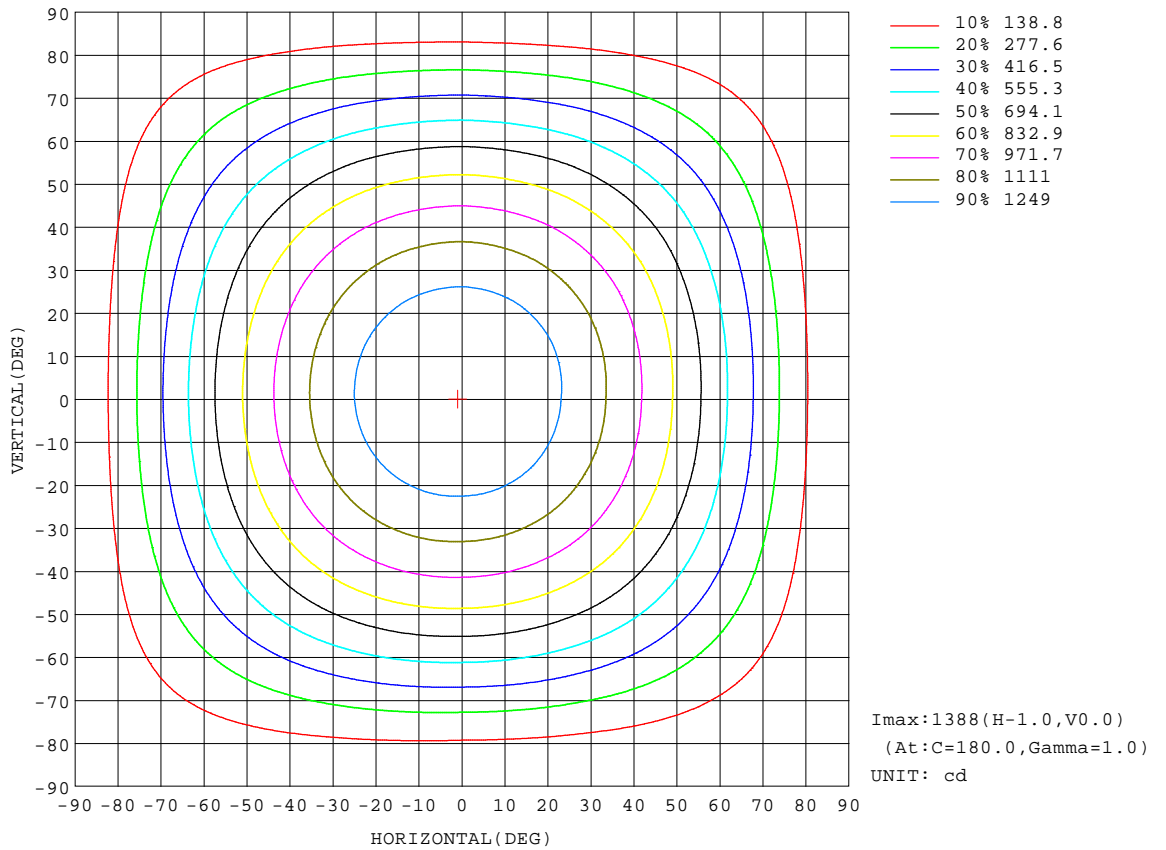


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.80V I:0.1410A P:30.200W PF:0.9620 Freq:50.00Hz		
Lamp Flux:4112.68x1 lm		
Name: NS60-2951195-30W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

Flux out:2963 lm

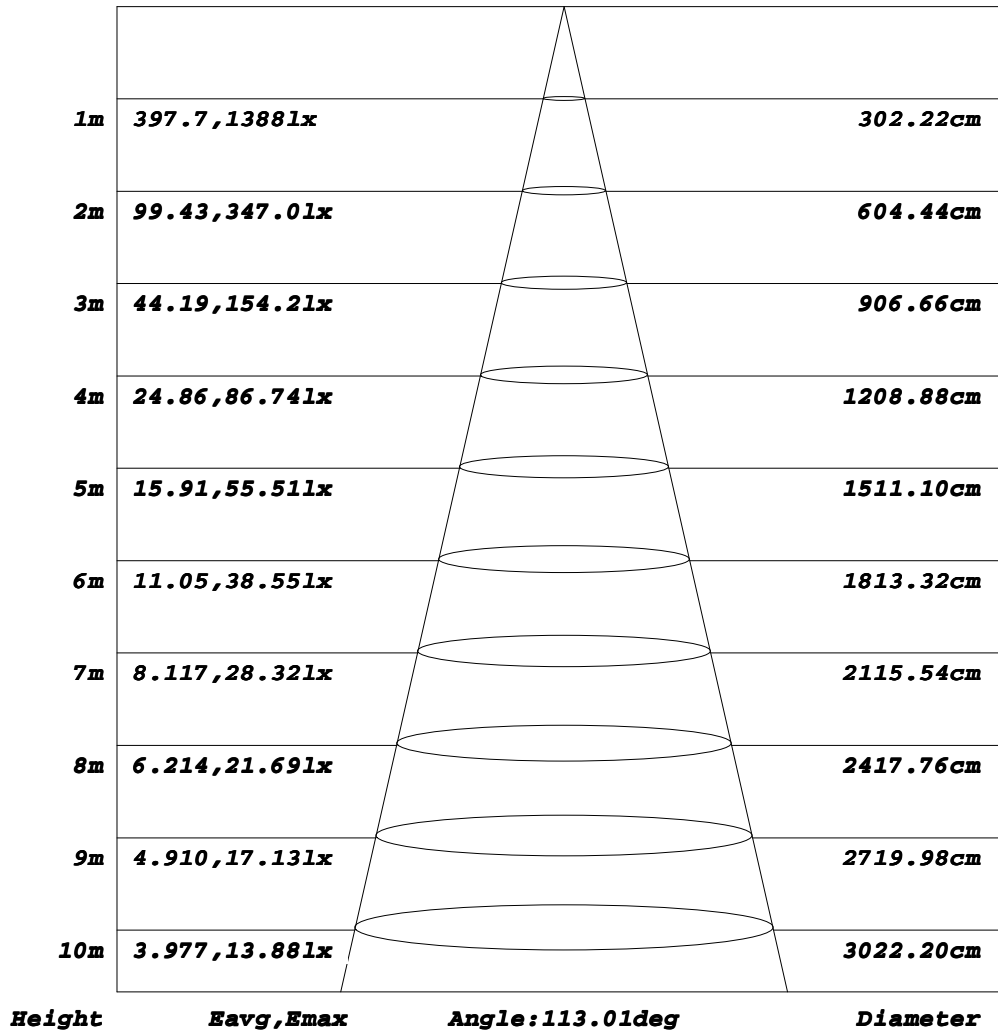


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.80V I:0.1410A P:30.200W PF:0.9620 Freq:50.00Hz		
Lamp Flux:4112.68x1 lm		
Name: NS60-2951195-30W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

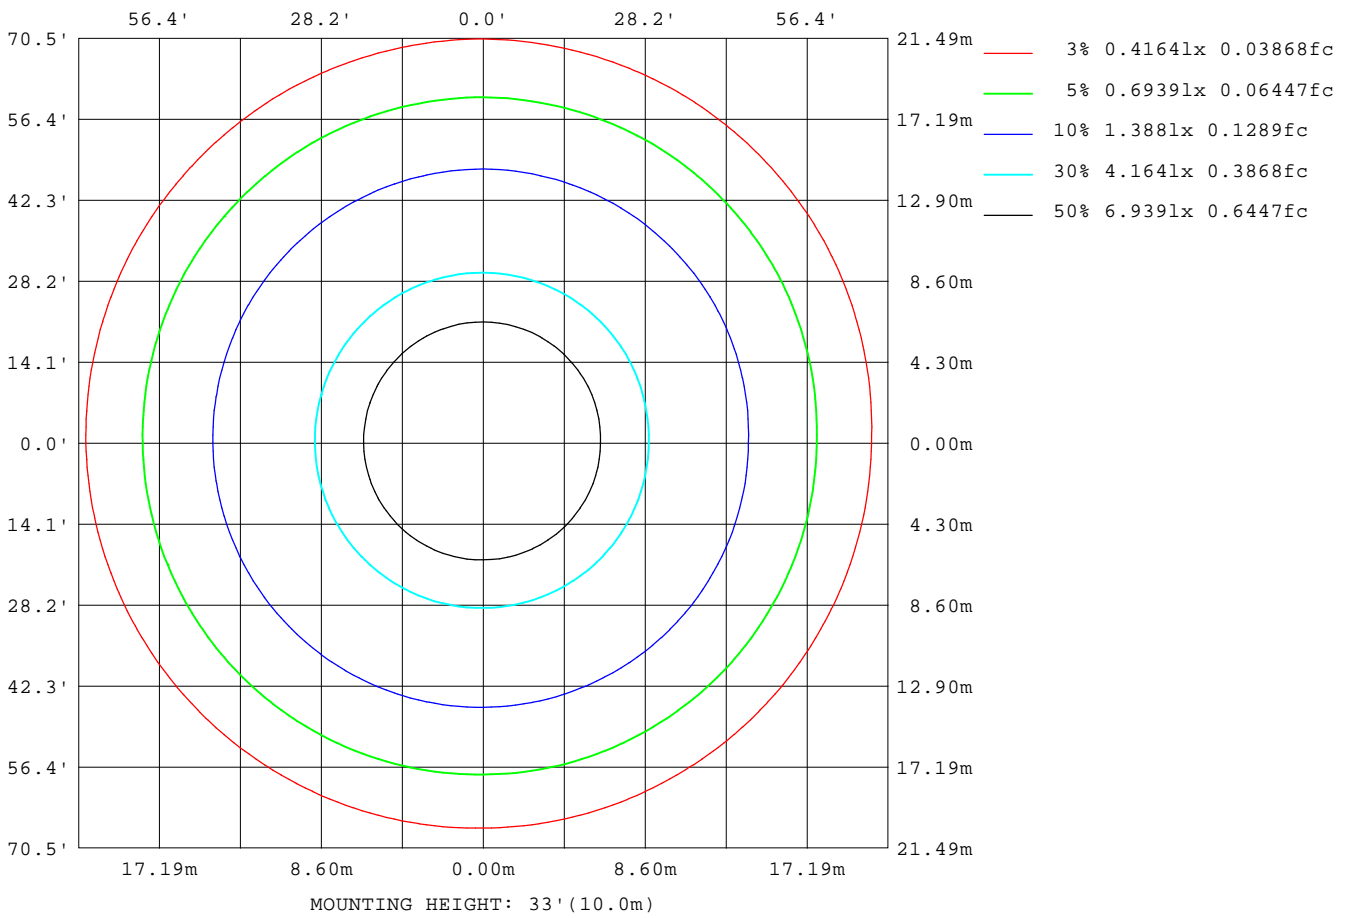

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

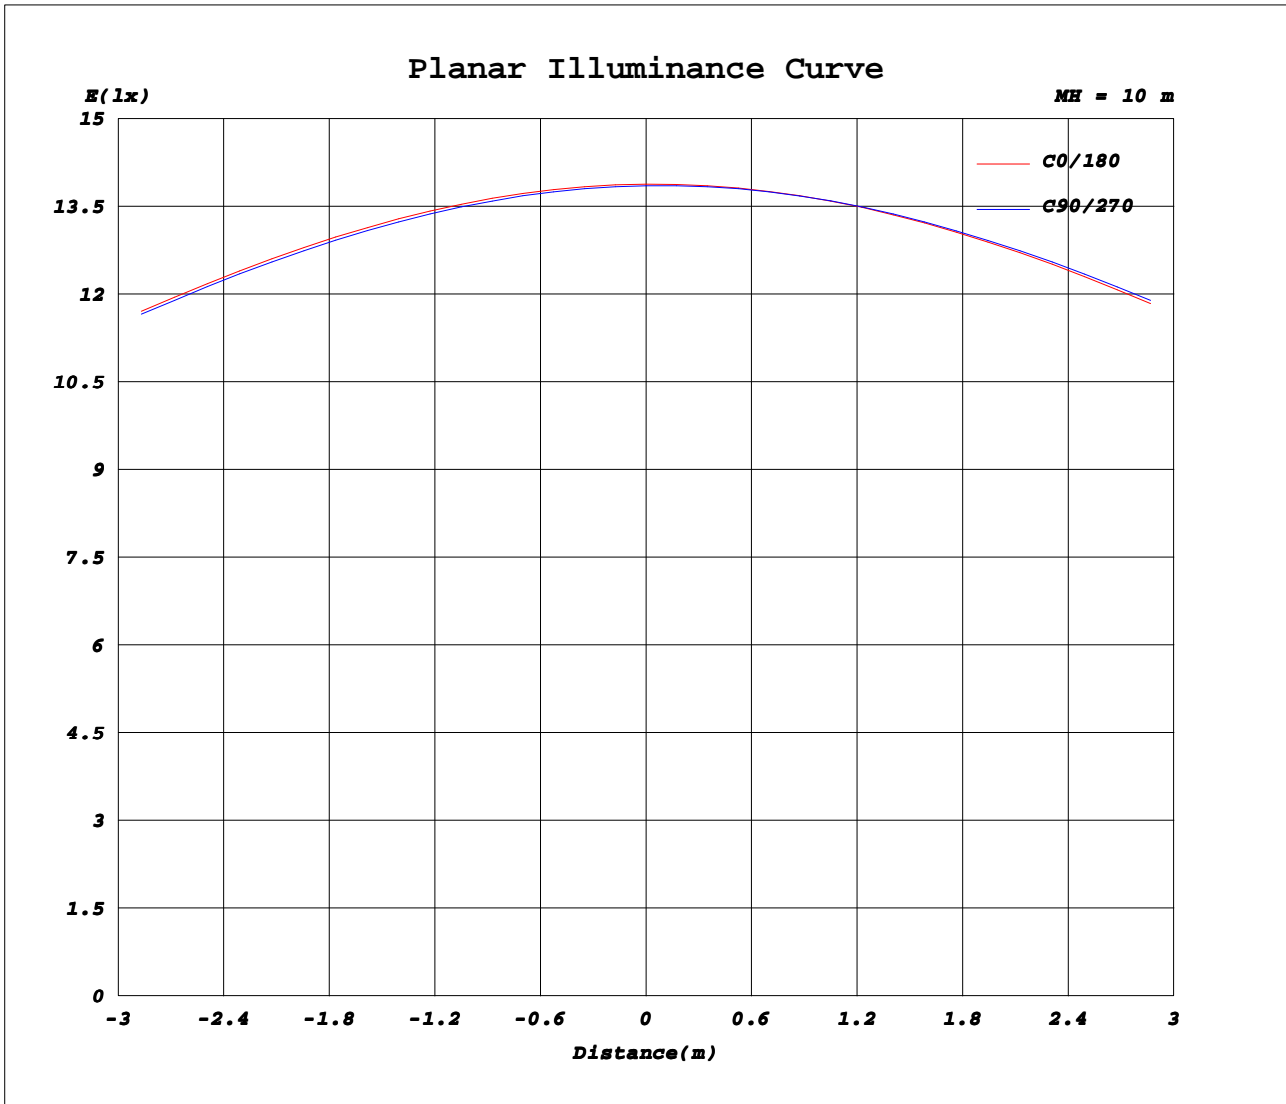

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.80V I:0.1410A P:30.200W PF:0.9620 Freq:50.00Hz		
Lamp Flux:4112.68x1 lm		
Name: NS60-2951195-30W	Type: LED	
MFR.: Lumega Group	DIM.: 295*1195mm	
	SUR.: 250*1150mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1388	1386	1386	1385	1386	1387	1388	1387	1386	1385	1386	1386							
5	1380	1376	1375	1375	1378	1381	1384	1385	1385	1384	1383	1381							
10	1359	1354	1353	1353	1357	1363	1368	1370	1370	1370	1367	1364							
15	1326	1321	1319	1320	1326	1333	1340	1344	1346	1345	1342	1335							
20	1282	1276	1274	1275	1282	1291	1300	1306	1310	1310	1305	1295							
25	1227	1221	1219	1221	1229	1239	1249	1257	1261	1262	1255	1244							
30	1161	1155	1153	1156	1165	1176	1188	1197	1203	1203	1196	1182							
35	1087	1080	1079	1081	1092	1104	1117	1127	1134	1135	1126	1110							
40	1003	996	994	998	1009	1022	1036	1048	1056	1057	1048	1030							
45	910	903	901	905	917	932	948	961	969	971	960	940							
50	813	803	801	804	819	836	854	868	876	877	865	844							
55	706	697	694	697	711	729	747	762	772	774	762	739							
60	595	584	580	583	599	618	637	653	663	665	652	629							
65	480	467	461	464	480	500	522	538	550	552	540	516							
70	364	348	342	344	361	383	405	421	431	433	421	398							
75	251	234	226	228	245	268	291	306	314	314	303	282							
80	146	130	123	124	141	163	184	195	201	200	190	172							
85	59.5	45.7	39.5	40.8	54.7	72.4	89.8	98.8	103	102	93.9	79.7							
90	7.00	6.18	6.32	7.44	9.81	12.9	16.6	22.2	26.7	28.9	25.4	18.1							
95	8.09	8.05	8.16	8.41	8.93	9.49	10.0	10.3	10.5	10.4	9.91	9.14							
100	9.22	9.10	9.14	9.36	9.89	10.5	11.0	11.3	11.4	11.2	10.8	10.1							
105	10.4	10.1	10.1	10.3	10.8	11.5	12.1	12.3	12.3	12.1	11.7	11.1							
110	11.4	11.1	11.0	11.1	11.8	12.5	13.1	13.2	13.1	12.8	12.4	12.0							
115	12.5	12.1	11.9	12.0	12.7	13.5	14.1	14.1	13.9	13.5	13.2	12.9							
120	13.6	13.1	12.9	13.0	13.7	14.5	15.1	15.1	14.8	14.4	14.1	13.9							
125	14.7	14.2	13.9	14.0	14.7	15.5	16.1	16.0	15.7	15.3	15.1	14.9							
130	15.8	15.2	15.0	15.1	15.7	16.5	17.1	17.0	16.6	16.2	16.0	15.9							
135	16.7	16.2	16.1	16.2	16.8	17.4	18.0	17.9	17.6	17.2	17.0	16.8							
140	17.6	17.3	17.2	17.3	17.8	18.4	18.8	18.8	18.5	18.2	18.0	17.8							
145	18.5	18.3	18.2	18.3	18.8	19.2	19.6	19.6	19.4	19.2	19.0	18.8							
150	19.5	19.4	19.3	19.4	19.7	20.1	20.4	20.5	20.4	20.2	20.0	19.8							
155	20.6	20.5	20.4	20.5	20.7	21.0	21.3	21.3	21.2	21.1	21.0	20.8							
160	21.7	21.6	21.5	21.5	21.7	21.9	22.1	22.1	22.1	22.0	21.9	21.9							
165	22.9	22.6	22.5	22.4	22.6	22.8	23.0	22.9	22.8	22.7	22.7	22.8							
170	24.0	23.6	23.3	23.2	23.3	23.6	23.8	23.6	23.4	23.3	23.4	23.6							
175	24.4	24.0	23.8	23.7	23.9	24.2	24.5	24.2	23.9	23.7	23.7	24.0							
180	24.5	24.1	23.9	23.9	24.1	24.3	24.5	24.3	24.1	23.9	23.9	24.1							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: